

stellar

BitRaser

BitRaser Mobile Eraser & Diagnostics

User Guide for version 3.0

[Legal Notices](#) | [About Stellar](#) | [Contact Us](#)

Copyright © Stellar Information Technology Private Limited. All rights reserved.

Table of Contents

1. GENERAL INFORMATION	2
1.1. INTRODUCTION	3
1.2. ABOUT THE GUIDE	5
1.3. CONTACT INFORMATION	6
2. GETTING STARTED.....	7
2.1. SYSTEM REQUIREMENTS	8
2.2. INSTALLATION PROCEDURE	9
2.3. CONNECTING TO THE INTERNET.....	14
2.4. CREATING NEW USER PROFILE	19
2.5. BUYING ADDITIONAL LICENSES.....	21
2.6. UPDATING THE SOFTWARE.....	22
2.7. GENERAL OVERVIEW OF USER INTERFACE	23
3. WORKING WITH BITRASER MOBILE ERASER & DIAGNOSTICS.....	26
3.1. GENERAL SETTINGS.....	27
3.2. ERASURE PROCESS	40
3.2.1. ERASURE STAGES	45
3.3. DIAGNOSTIC PROCESS.....	51
3.3.1. DIAGNOSTIC STAGES.....	55
3.4. DETAILS SECTION	60
3.5. WORKING ON REPORTS	65
3.5.1. PREVIEW REPORT	69
3.5.2. SAVE REPORT	71
3.5.3. SEND REPORT TO BITRASER CLOUD	72
3.5.4. CHANGE REPORT SETTINGS	73
3.6. FORGOT LOGIN PASSWORD.....	75
4. FREQUENTLY ASKED QUESTIONS (FAQ).....	77
5. LEGAL NOTICES	80
6. ABOUT STELLAR	83

1. GENERAL INFORMATION

1.1. [About BitRaser Mobile Eraser & Diagnostics](#)

1.2. [About the Guide](#)

1.3. [Contact Information](#)

1.1. INTRODUCTION

About BitRaser Mobile Eraser & Diagnostics

BitRaser Mobile Eraser & Diagnostics is a portable and reliable application providing permanent **Data Erasure** and **Mobile Diagnostics** of mobile devices such as iPhone, iPad, and Android devices.

Using the **BitRaser Data Erasure** process, data once erased cannot be recovered. This ensures that sensitive data does not fall in the wrong hands when mobile devices are disposed of, recycled, or sold. This software is used by organizations, refurbishers, and mobile data erasure companies to facilitate the safe disposal, reuse, or resale of mobile devices. The software helps meet statutory and regulatory compliance needs with tamper-proof audit trails for data security and privacy – SOX, GLB, HIPAA, ISO27001, EU-GDPR, and PCI-DSS.

The **Mobile Diagnostics** process enables quick identification of hardware problems for mobile devices running on iOS and Android. **BitRaser** diagnostics process helps determine the health status of various components such as the battery, camera, touch-pad, display, microphone, SIM card slots, RAM, internal memory, etc. of a mobile device through series of automated and assisted tests.

This application provides the user to generate an erasure or diagnostic report containing the result of the process. The report can be saved to a hard drive/external media or collected by the **BitRaser Cloud Console**.

Key Features of BitRaser Mobile Eraser & Diagnostics:

- Securely and permanently erase sensitive data from Android & iOS devices.
- Perform high-speed simultaneous erasure of up to 40 devices most efficiently.
- Cloud integration for user management, licenses & reports.
- Pay per use – No expiry of license.
- Provides an option to check the ESN Status of the mobile devices.
- Support to provide pre-report and asset details before the erasure/diagnostic process.
- Support to erase untrusted iOS devices.
- Option to erase device which has a Samsung Knox container.
- Device label printing available with the company logo and various parameters that can be customized as per requirement.
- Support for customizing general settings, user settings, iOS settings, Android settings, printer settings, and network settings.
- List view and Grid view option for the connected/erased/diagnosed devices.
- Provides an option to edit the USB port name for easy identification.

- Erases devices that are in recovery mode.
- Erase working iOS devices with broken screens.
- Supports 11 erasure standards:
 - Native OS Erasure
 - NIST 800-88 Purge
 - Zeroes (1 Pass)
 - Pseudo Random (2 passes)
 - US Department of Defense, DoD 5220.22-M (3 passes)
 - US Department of Defense, DoD 5200.22-M, ECE (7 passes)
 - B.Schneiers algorithm (7 passes)
 - Peter Gutmann (35 passes)
 - US Army AR 380-19 (3 passes)
 - US Air Force, AFSSI 5020 (3 passes)
 - British HMG IS5 (3 passes).
- Reporting:
 - Generate 100% secure and tamper-proof reports.
 - Provides an option to preview the runtime report.
 - Option to save erasure/diagnostic reports in various formats such as PDF, XML, and CSV.
 - Fast and user-friendly report searching (including search by date).
 - Automatically saves erasure reports on the same computer from which erasure is performed.
 - Automatic report delivering to **BitRaser Cloud Console**.
 - Option to customize report layout as per requirements.
 - Full visibility of hardware and erasure details for customized reporting.
- Devices Supported:
 - **Android:** All devices with Android OS version 5.0 and above
 - **iPhones:** iPhone 13 Pro Max, iPhone 13 Pro, iPhone 13, iPhone 13 Mini, iPhone 12 Pro Max, iPhone 12 Pro, iPhone 12, iPhone 12 Mini, iPhone SE (2nd Generation), iPhone 11 Pro Max, iPhone 11 Pro, iPhone 11, iPhone XS Max, iPhone XS, iPhone XR, iPhone X, iPhone 8, iPhone 8 Plus, iPhone 7, iPhone 7 Plus, iPhone 6S, iPhone 6S Plus, iPhone 6, iPhone 6 Plus, iPhone SE, iPhone 5S, iPhone 5C, iPhone 5
 - **iPads:** iPad Air 4th Gen, iPad 8th Gen, iPad Pro 4th Gen, iPad 7th Gen, iPad Mini 5th Gen, iPad Air 3rd Gen, iPad Pro 3rd Gen, iPad 6th Gen, iPad Pro 2nd Gen, iPad 5th Gen, iPad Pro, iPad Mini 4, iPad Mini 3, iPad Air 2, iPad Mini 2, iPad Air, iPad Mini, iPad 4th Gen, iPad 3rd Gen, iPad 2
 - **iPod Touch:** All generations

1.2. ABOUT THE GUIDE

Welcome to **BitRaser Mobile Eraser & Diagnostics User Guide** for version 3.0! Choose a topic from the left to navigate through different topics that are in this guide.

This user guide contains sequential steps to assist you through various BitRaser Mobile Eraser & Diagnostics functions. Each function is explained in detail, in the corresponding sections. The guide covers the following major topics:

1. [General Information](#)
2. [Getting Started](#)
3. [Working with BitRaser Mobile Eraser & Diagnostics](#)
4. [Frequently Asked Questions \(FAQ\)](#)

This guide is intended for individuals who use **BitRaser Mobile Eraser & Diagnostics** to erase or diagnose mobile devices running iOS and Android.

- There are **Cautions**, **Notes**, and **Tips** in some topics of this guide for your understanding and ease of work. **Cautions** are given in yellow boxes and **Notes** and **Tips** are given in *italics* style for easy identification.

Definition of acronyms used in this guide:

ITEM	EXPLANATION
ECID	The ECID (Exclusive Chip Identification also referred to as Unique Chip ID in official Apple terms) is an identifier unique to every Apple device.
IMEI	IMEI (International Mobile Equipment Identity) is a 15- or 17-digit code that uniquely identifies mobile phone sets.
JPG or JPEG	Stands for Joint Photographic Experts Group. JPG or JPEG is a standard file format for compressing pictures so they can be stored or sent by e-mail more easily.
PDF	"Portable Document Format" is a file format designed to present documents consistently across multiple devices and platforms.
PNG	Portable Network Graphics (PNG) is a raster-graphics file-format for image compression.
User ID	Stands for User identification, which by default is the e-mail address of the user in this guide.
XML	"Extensible Markup Language" is a metalanguage that allows users to define their customized markup languages, especially to display documents on the Internet.

For any queries or feedback related to this guide, kindly [contact us](#).

1.3. CONTACT INFORMATION

Our **Technical Support** professionals will give solutions for all your queries related to **BitRaser Mobile Eraser & Diagnostics**.

- You can either call us or go online to our support section at <http://www.stellarinfo.com/support/>
- For price details and to place the order, click <https://www.bitraser.com/buy/> or e-mail the sales team at sales@bitraser.com
- To join our partner network, click <https://www.bitraser.com/partner/>
- To connect to our partner team, e-mail us at partner@bitraser.com
- Chat Live with an Online technician at <https://www.bitraser.com/>
- Search in our extensive Knowledgebase at <https://www.bitraser.com/kb/>
- Submit query at <https://www.bitraser.com/contact-us/>
- E-mail to Stellar Support at support@stellarinfo.com

2. GETTING STARTED

- 2.1. [System Requirements](#)
- 2.2. [Installation Procedure](#)
- 2.3. [Connecting to the Internet](#)
- 2.4. [Creating a New User Profile](#)
- 2.5. [Buying Additional Licenses](#)
- 2.6. [Updating the Software](#)
- 2.7. [General Overview of User Interface](#)

2.1. SYSTEM REQUIREMENTS

Before you start using **BitRaser Mobile Eraser & Diagnostics**, make sure that your computer meets the following requirements.

Minimum System Requirements:

- **Processor:** x86 or x64 Processor
- **RAM:** 1 GB Minimum (4 GB Recommended)
- **Hard Disk:** 20 GB of free space
- **iOS Version for Device Erasure:** All versions supported
- **iOS Version for Device Diagnostics:** 8.0 and above
- **Android Version for Device Erasure or Diagnostics:** 5.0 and above
- **Devices Supported:**
 - **Android:** All devices with Android OS version 5.0 and above
 - **iPhones:** iPhone 13 Pro Max, iPhone 13 Pro, iPhone 13, iPhone 13 Mini, iPhone 12 Pro Max, iPhone 12 Pro, iPhone 12, iPhone 12 Mini, iPhone SE (2nd Generation), iPhone 11 Pro Max, iPhone 11 Pro, iPhone 11, iPhone XS Max, iPhone XS, iPhone XR, iPhone X, iPhone 8, iPhone 8 Plus, iPhone 7, iPhone 7 Plus, iPhone 6S, iPhone 6S Plus, iPhone 6, iPhone 6 Plus, iPhone SE, iPhone 5S, iPhone 5C, iPhone 5
 - **iPads:** iPad Air 4th Gen, iPad 8th Gen, iPad Pro 4th Gen, iPad 7th Gen, iPad Mini 5th Gen, iPad Air 3rd Gen, iPad Pro 3rd Gen, iPad 6th Gen, iPad Pro 2nd Gen, iPad 5th Gen, iPad Pro, iPad Mini 4, iPad Mini 3, iPad Air 2, iPad Mini 2, iPad Air, iPad Mini, iPad 4th Gen, iPad 3rd Gen, iPad 2
 - **iPod Touch:** All generations

Note: *You need an active internet connection.*

Caution: *Installing **BitRaser Mobile Eraser & Diagnostics** on your computer or laptop will format the hard drive to create partitions. Backup all your data from your computer before installing **BitRaser Mobile Eraser & Diagnostics**.*

2.2. INSTALLATION PROCEDURE

Caution: *Installing BitRaser Mobile Eraser & Diagnostics on your computer or laptop will format the hard drive to create partitions. Backup all your data from your computer before installing BitRaser Mobile Eraser & Diagnostics.*

To install or run **BitRaser Mobile Eraser & Diagnostics** on your computer or laptop, you will need a bootable media with **BitRaser Mobile Eraser & Diagnostics** ISO file installed on it. An ISO file combines all the **BitRaser Mobile Eraser & Diagnostics** installation files into a single uncompressed file.

When you buy licenses for **BitRaser Mobile Eraser & Diagnostics**, you can receive the software in two ways: You can receive a **BitRaser Mobile Eraser & Diagnostics** bootable media (USB drive or DVD) from **Stellar**, or you can receive a link to download a **BitRaser Mobile Eraser & Diagnostics ISO file**.

If you have downloaded the **BitRaser Mobile Eraser & Diagnostics ISO file**, you can create a bootable media. To do this, copy the ISO file onto your drive and then burn the ISO onto a USB drive or DVD using any 3rd party software. Then simply install **BitRaser Mobile Eraser & Diagnostics** onto your computer directly from your USB or DVD drive using the steps given below.


Installation Steps:

Verify the **BitRaser Mobile Eraser & Diagnostics** bootable media is connected to your computer and use the following steps:


1. Power on your computer and check the BIOS boot options to boot from the bootable media (USB drive or DVD).

Note: *To know how to check the BIOS boot options, refer to the manufacturer's documentation that came with your computer.*


2. Once the computer boots, you will see the "**BitRaser Mobile Eraser & Diagnostics**" screen. Click **Next** to install **BitRaser Mobile Eraser & Diagnostics** on your computer.

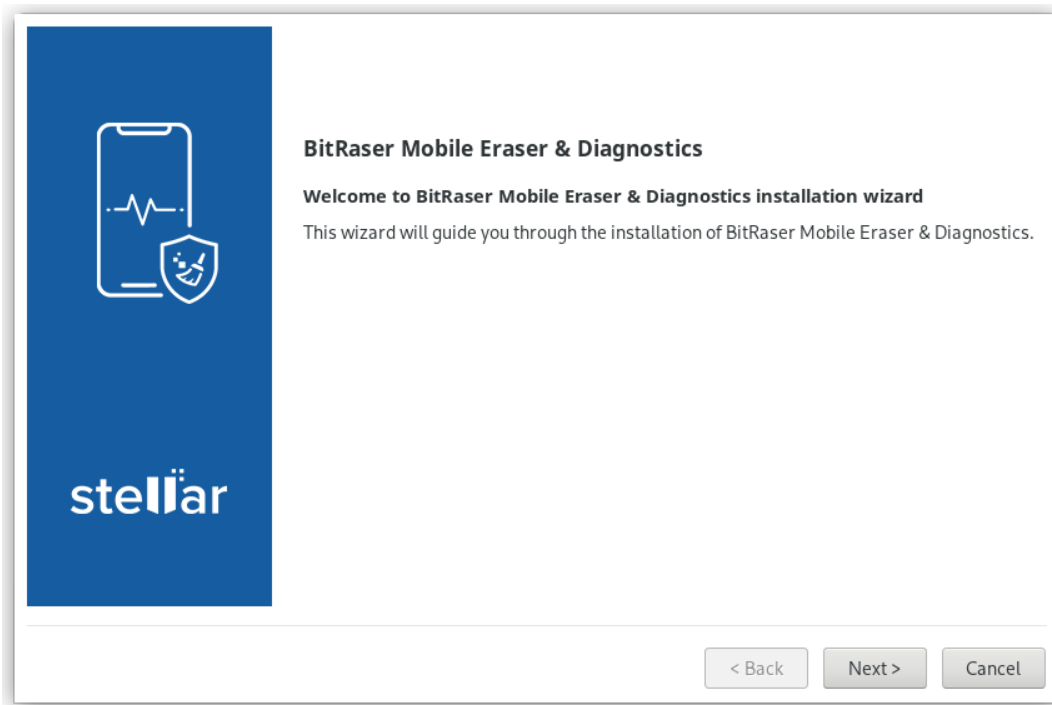


3. **End User License Agreement** screen is displayed. Click **Accept** to enable the **Next** button.

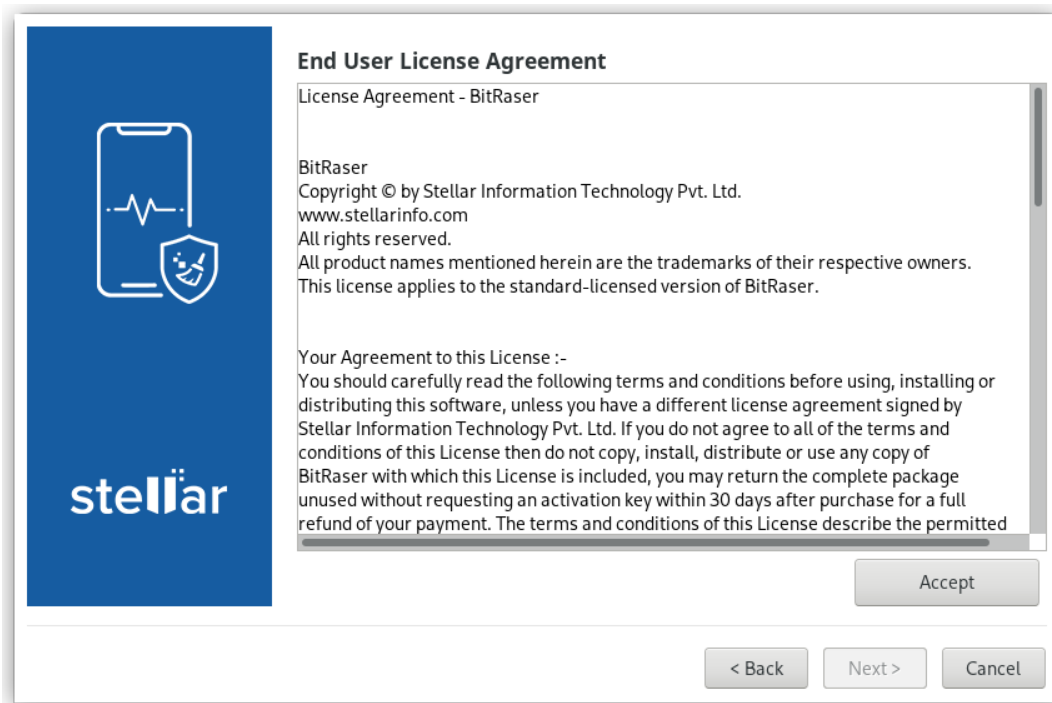


4. Click the **Next** button to proceed.

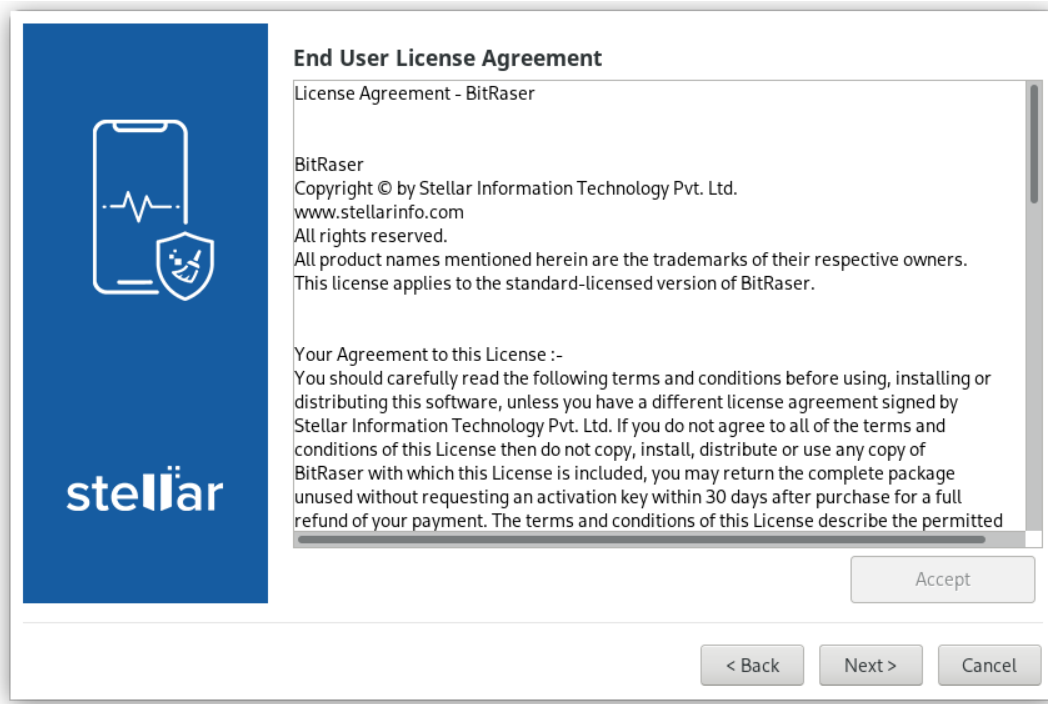


5. **Backup all your Data** window is displayed. Click **Next** to open **BitRaser Mobile Eraser & Diagnostics** screen.

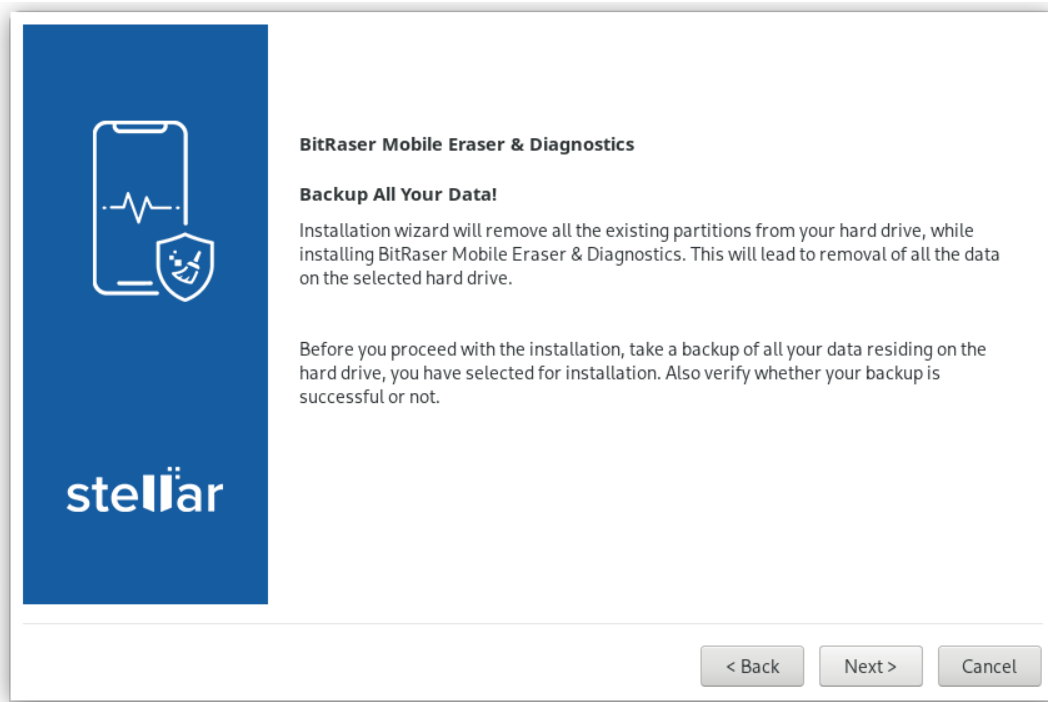

- Using the **Select Disk** drop-down option, click on the hard drive name on which you want to install **BitRaser Mobile Eraser & Diagnostics**.

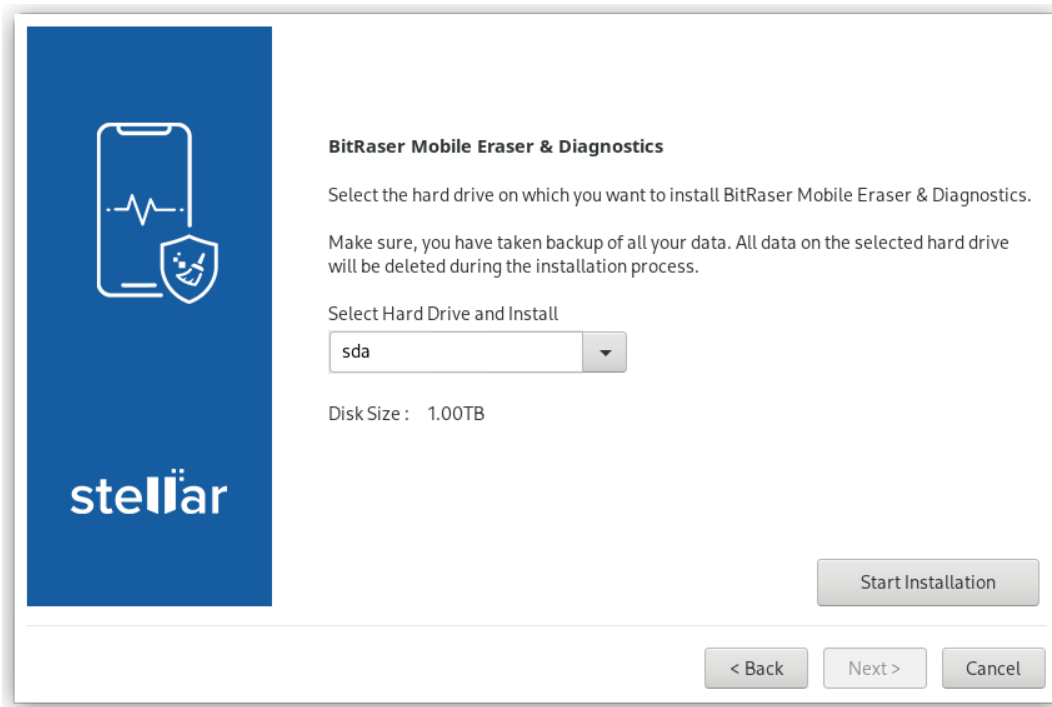


- Click **Start Installation**. "**Please wait... installation is in progress**" message shows that the installation has started.

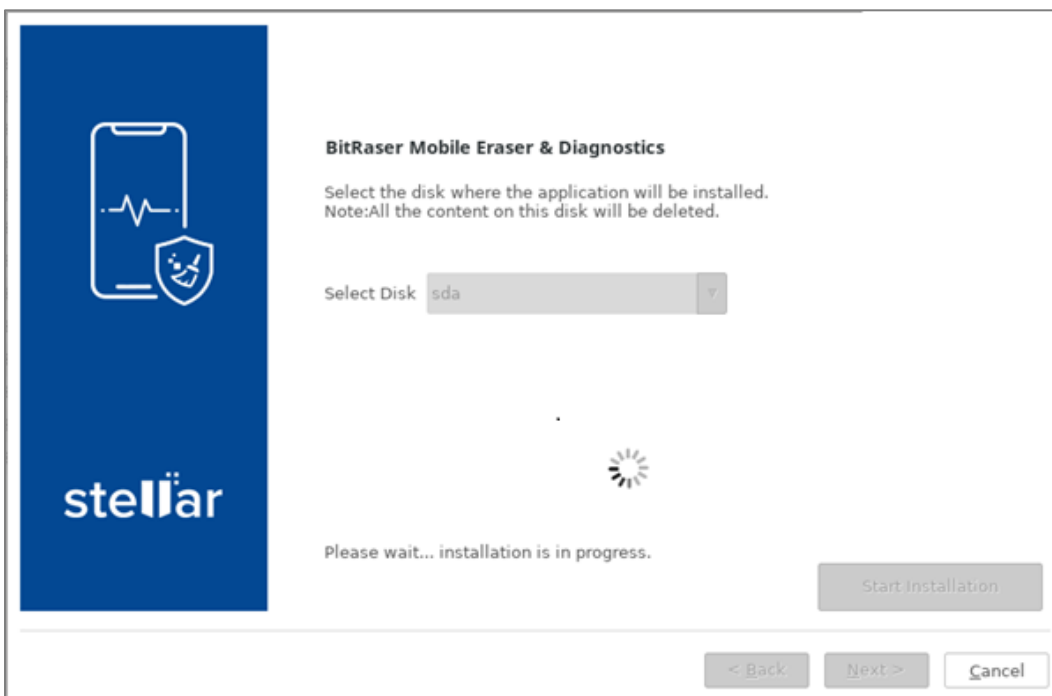

- After the installation process is completed, a screen appears as shown below. Remove installation media from your system and click on **Reboot** button to restart the workstation.

Note: if you want to turn off your computer system, click **Shutdown** button.

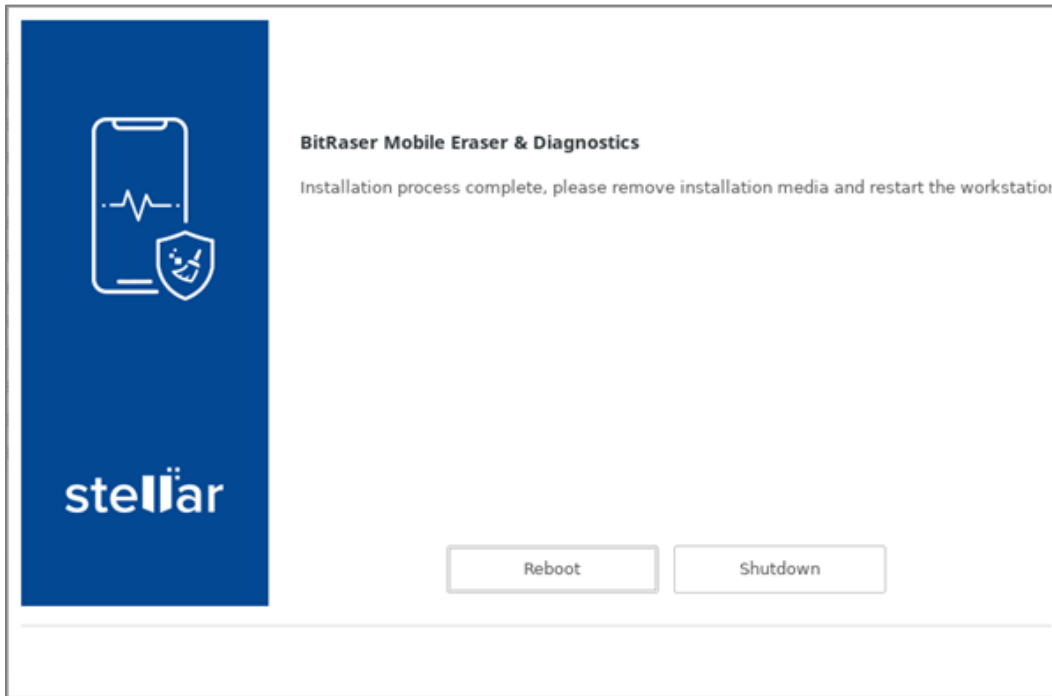

2.3. CONNECTING TO THE INTERNET

Once the **BitRaser Mobile Eraser & Diagnostics** is installed and started, it asks you to connect to the internet and the **Network Settings** dialog is displayed on startup:


Network Settings has the following four tabs:

1. **Ethernet:** Use this tab to connect to the internet using the Ethernet or LAN connection of your computer. This tab has the following fields:


The screenshot shows the 'Network Settings' dialog box for 'BitRaser Mobile Eraser & Diagnostics'. The 'Network' tab is selected, and the 'Ethernet' sub-tab is active. The 'Network Device' is set to 'eno1' and the 'Configuration' is set to 'Manual'. The 'Address' section includes fields for IP Address (192.168.24.16), Net Mask (255.255.255.0), and Gateway (192.168.24.1). The 'Name Servers' section includes fields for DNS Primary (8.8.8.8) and DNS Secondary (8.8.4.4). Buttons for 'Reset', 'Connect', 'Cancel', 'Apply', and 'OK' are located at the bottom of the dialog.

- **Network Device:** Use this field to select the Network Device from the drop down options, with which you wish to connect the BitRaser Mobile Eraser & Diagnostics application to the internet.
- **Configuration:** Use this field to select **Manual** or **Automatic** Internet Protocol (IP) configuration from the drop down options.
 - **Manual Configuration:** The Manual configuration is selected in this field by default. This configuration has the following fields to fill:
 - IP Address
 - Net Mask
 - Gateway
 - DNS Primary
 - DNS Secondary
 - **Automatic Configuration:** This configuration has the following fields to fill:
 - DHCP Hostname
 - Name Servers


To connect to the internet through Ethernet, select the Network Device and Configuration. Enter the fields as given above and click **Connect**. The following dialog box shows that **BitRaser Mobile Eraser & Diagnostics** is successfully connected to the internet:

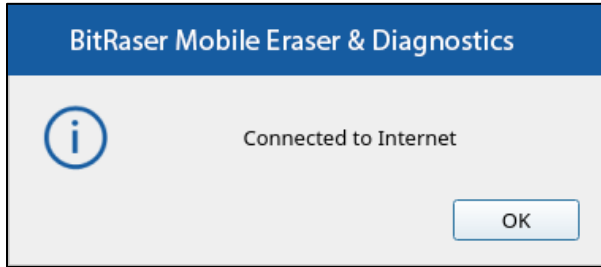

Alternatively, if the entered details are incorrect or the LAN cable is not connected, the following dialog box appears:

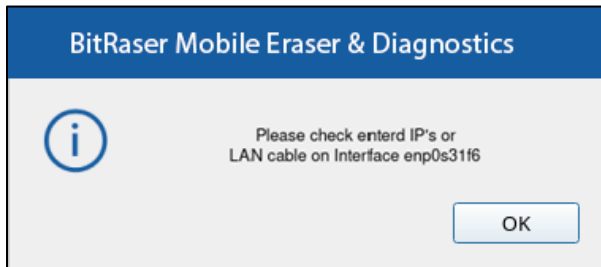


2. **Wireless:** BitRaser Mobile Eraser & Diagnostics also allows you to connect to the internet through the wireless device of your computer.

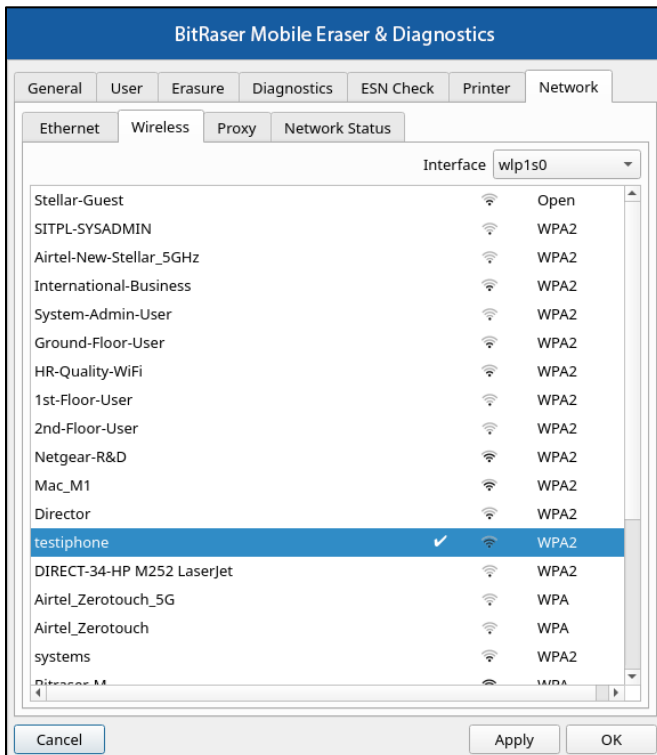


To do this:

- Select the wireless device from the **Interface** drop-down option. BitRaser Mobile Eraser & Diagnostics automatically scan and displays the list of wireless networks available to connect.
- Double click on the wireless network from the list.
- If the network is secured, it asks you for the password. Enter the password and click **Connect**:

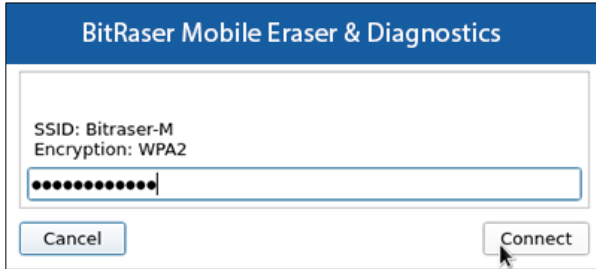

- The following dialog box shows that **BitRaser Mobile Eraser & Diagnostics** is successfully connected to the internet:

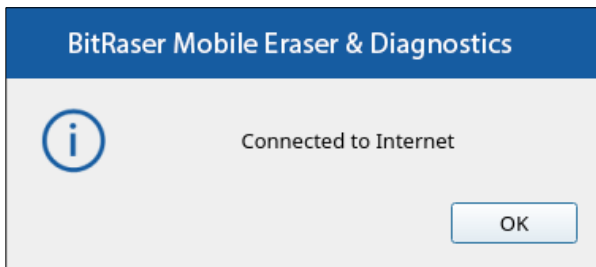

3. **Proxy:** BitRaser Mobile Eraser & Diagnostics gives an option to connect to a **Proxy** server if required.




The following fields need to be filled:

FIELD NAME	DESCRIPTION
Hostname/IP	Enter the address of the proxy server.
Port	Enter the port number that the proxy server uses.
Username	Enter the proxy user name.
Password	Enter the authentication password of the proxy user.


Click on **Set** to save your preferences.

4. **Network Status:** This tab shows the status of the network - **Connected** or **Disconnected**. The Refresh Button allows you to refresh the network status. This tab also has an option to ping a particular URL to check the network connectivity.

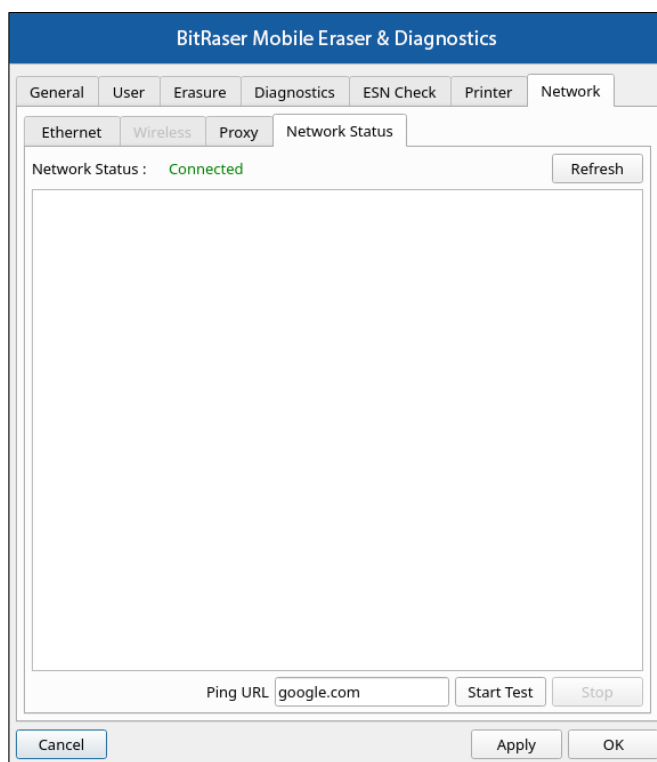

To ping a URL:

- Enter any URL, such as **bitraser.com**, in the **Ping URL** field, and click on **Start Test**.
- If the network is connected successfully, this option will show a reply from the URL in bytes of data, similar to the screen given below:

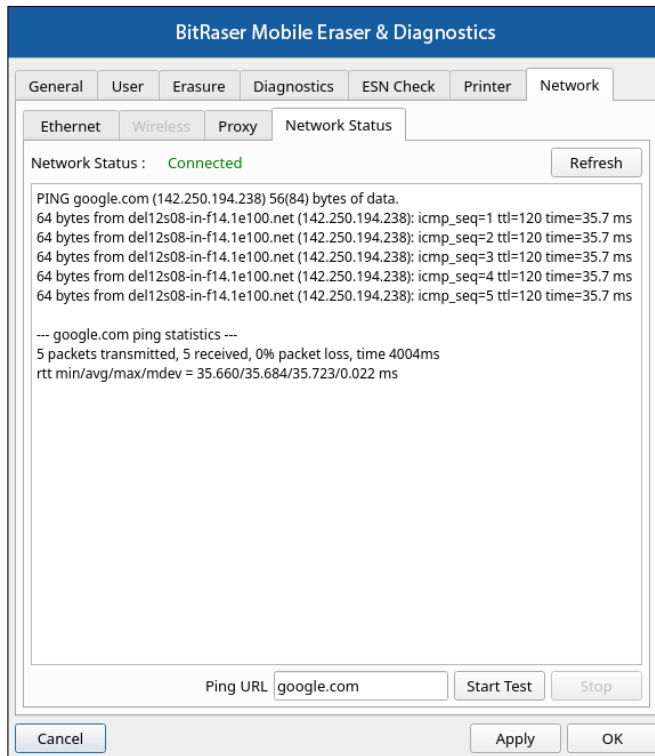


Click on **OK** to save the network settings and close the window or **Cancel** to close the window without saving.

Note: At any point in time, if you wish to open the network settings again, double click on the Network icon in the bottom right of the screen.


2.4. CREATING NEW USER PROFILE

When you run the **BitRaser Mobile Eraser & Diagnostics** for the first time, it asks you to create a new user profile. To create a new user profile, do the following steps:

1. Click on **Create New User** button.

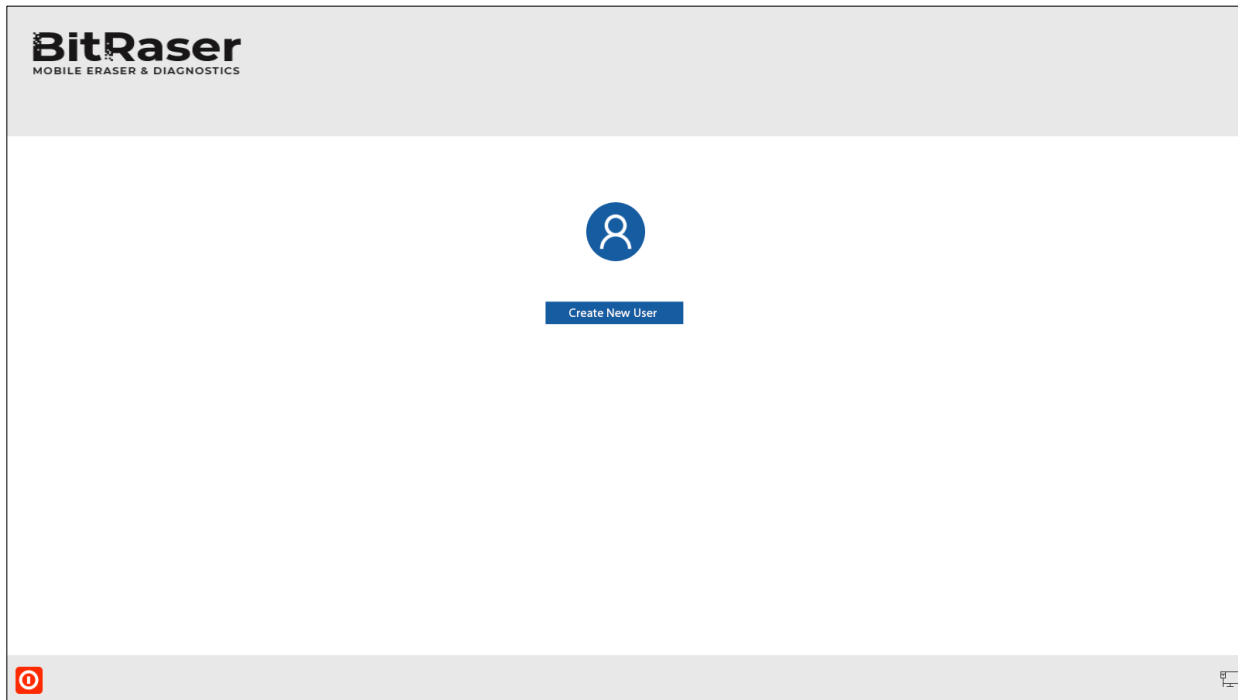

2. The following screen appears with the fields to fill:

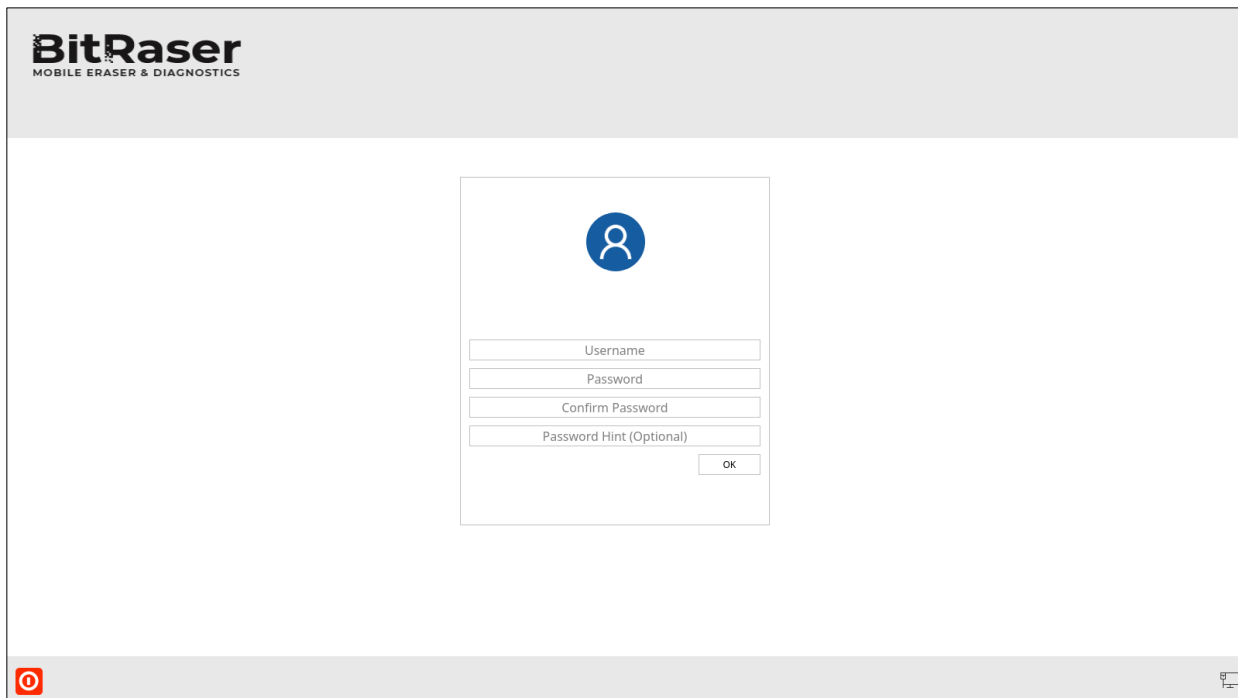

- Username
- Password
- Confirm Password
- Password Hint (Optional)

3. Fill in the above fields and click **OK**.

4. You can now login to **BitRaser Mobile Eraser & Diagnostics** using the new user credentials.

Note: *The new user profile is only to log in to **BitRaser Mobile Eraser & Diagnostics** application. This option does not create a profile to login to **BitRaser Cloud**. The credentials to log in to **BitRaser Cloud** are created separately.*

2.5. BUYING ADDITIONAL LICENSES

You can purchase the additional licenses from <https://www.bitraser.com>. New licenses will be added to the registered account.

To purchase the licenses for BitRaser Mobile Eraser & Diagnostics, follow these steps:


1. Go to <https://www.bitraser.com/>
2. Click **Buy Now** button.
3. Select the tab **BitRaser Mobile Eraser & Diagnostics**.
4. From the available license options, select the number of licenses you want to purchase.
5. Click **BUY NOW** button.
6. After you complete the payment and enter the required details, click **Buy Now** button. The licenses are sent on the e-mail address along with the BitRaser Cloud log-in credentials for license management and distribution.

Note: *You need to use the same email-id given at the time of the first purchase to add the additional licenses to your account. In case a different email-id is entered, a new cloud log-in account will be created with the purchased licenses.*


2.6. UPDATING THE SOFTWARE

Stellar releases periodical software updates for **BitRaser Mobile Eraser & Diagnostics** software. You can update the software to keep it up-to-date. These updates can add new functionality, feature, service, or any other information that can improve the software.


BitRaser Mobile Eraser & Diagnostics automatically check for software updates as soon as it is connected to the internet. If an update is available, **BitRaser Mobile Eraser & Diagnostics** will show a dialog to update the software as shown below:

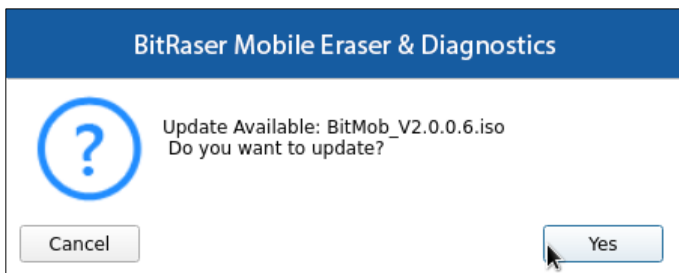

1. Click **Yes** to start the ISO downloading process. The download dialog appears as follows:

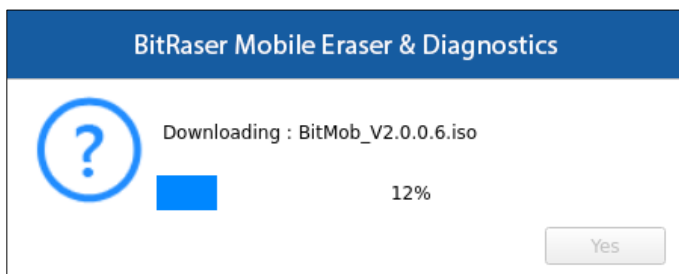

2. Once the download is completed successfully, **Update Success** message appears as shown below:

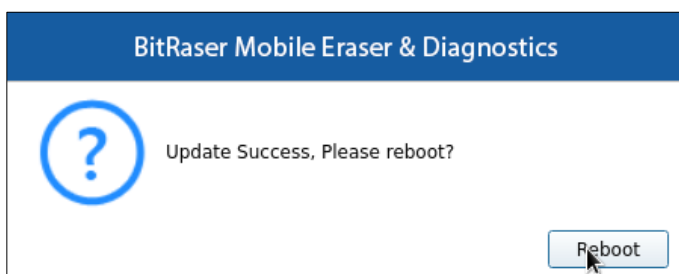


3. Click **Reboot** to install and update **BitRaser Mobile Eraser & Diagnostics**.

Note: **BitRaser Mobile Eraser & Diagnostics** also keep the previous version installed on your computer along with the latest version.


2.7. GENERAL OVERVIEW OF USER INTERFACE


The user interface is divided into three main areas:


1. Header area
2. Work area
3. Footer area

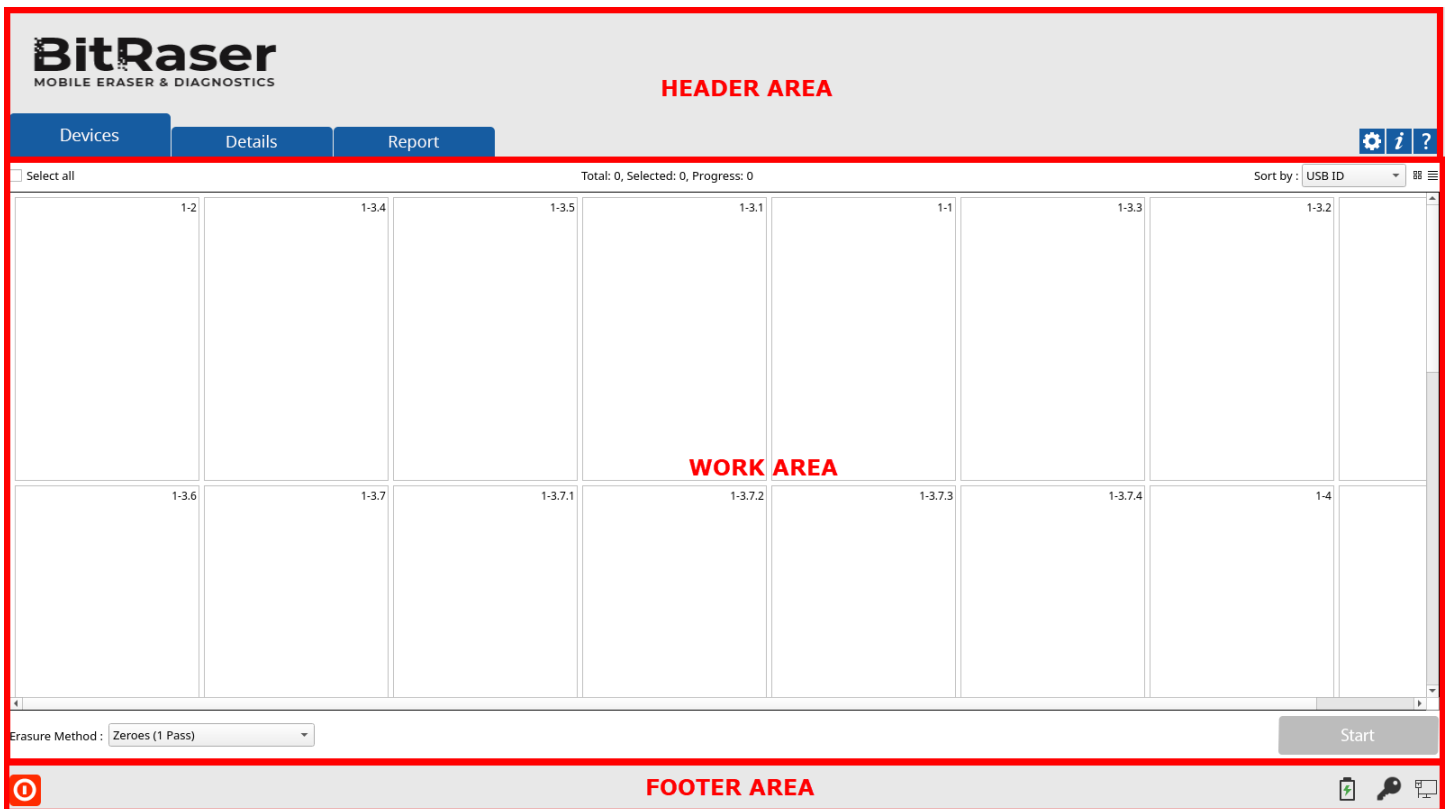



1. **Header Area:** The header area contains the following tabs and buttons:


- **Devices Tab** **Devices** : This tab contains a list the connected devices in grid or list view and is used to perform erasure and diagnostic process.
- **Details Tab** **Details** : This tab is used to enter various details to be included in reports. To know more, refer to the [Details Section](#).
- **Report Tab** **Report** : This tab provides a list of **BitRaser Mobile Eraser & Diagnostics** reports and various options for [Working on Reports](#).
- **Settings Button**  : Click this button to update various settings available for **BitRaser Mobile Eraser & Diagnostics**.

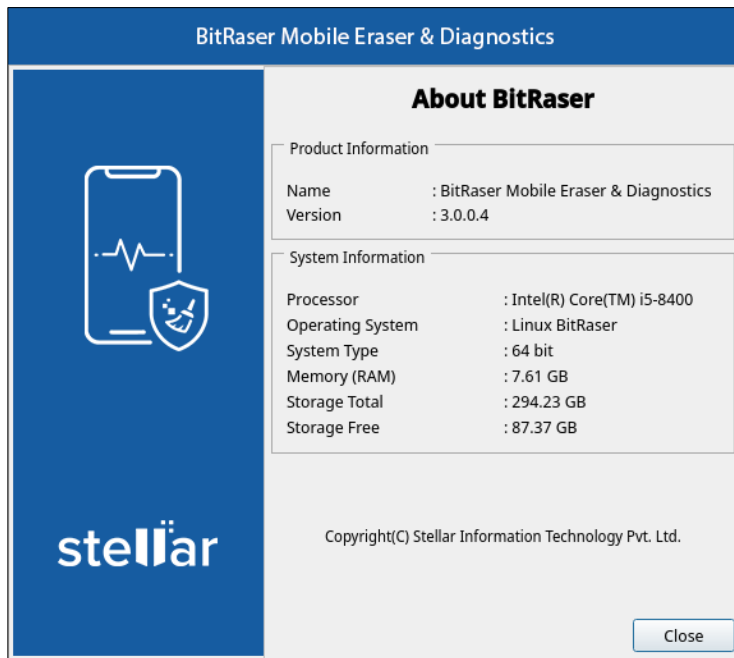
- **About Button**  : Click this button to see information about **BitRaser Mobile Eraser & Diagnostics** and system information as given below:






- **Help Button**  : Click this button to open this help guide from the application.
2. **Work Area:** The work area contains all the specific information and functionality of the selected tab or button.
 3. **Footer Area:** The footer area contains the following buttons:

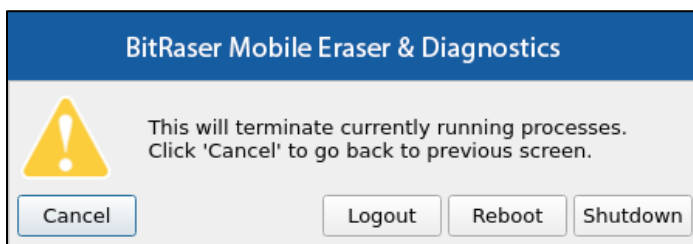- **Power Button**  : Click this button to logout, reboot, or shutdown **BitRaser Mobile Eraser & Diagnostics**. The following screen appears:



- **License Key Button**  : Click this button to view the **BitRaser Mobile Eraser & Diagnostics** license information. If you are not connected to **BitRaser Cloud**, this button opens the [User Settings](#) for login authentication.

- **Network Button**  or  : Click this button to check the current status of the network. Double click to open the [Network Settings](#). A red cross mark on this button shows that **BitRaser Mobile Eraser & Diagnostics** is not connected to the network.
- **Battery Icon**  : This icon shows the battery status of the laptop.

Note: This feature is not available for PC's.

3. WORKING WITH BITRASER MOBILE ERASER & DIAGNOSTICS

3.1. [General Settings](#)

3.2. [Erasure Process](#)

3.2.1. [Erasure Stages](#)

3.3. [Diagnostic Process](#)

3.3.1. [Diagnostic Stages](#)

3.4. [Details Section](#)

3.5. [Working on Reports](#)

3.5.1. [Preview Report](#)

3.5.2. [Save Report](#)

3.5.3. [Send Report to BitRaser Cloud](#)

3.5.4. [Change Report Settings](#)

3.6. [Forgot Login Password](#)


3.1. GENERAL SETTINGS

Before starting an Erasure or a Diagnostic process, it is important to understand and configure various settings of **BitRaser Mobile Eraser & Diagnostics**. After the first login, the **Settings** window appears automatically. Alternatively, click on the **Settings** icon on the top right corner of the screen. Use this window to change the various general and default settings of the software. This window has the following tabs:

1. [General Settings](#)
2. [User Settings](#)
3. [Erasure Settings](#)
4. [Diagnostic Settings](#)
5. [ESN Check](#)
6. [Printer Settings](#)
7. [Network Settings](#)

1. General Settings:

The General Settings tab allows you to configure erasure warning settings, grid settings, cloud report settings, delete the local reports and select the default erasure method.

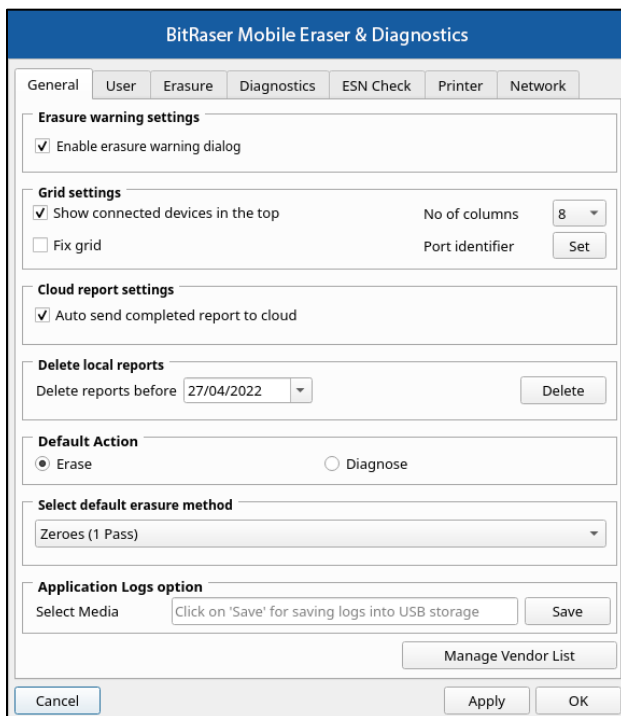

The screenshot shows the 'General' tab of the BitRaser Mobile Eraser & Diagnostics settings window. The window has a blue header with the title 'BitRaser Mobile Eraser & Diagnostics'. Below the header are several tabs: 'General', 'User', 'Erasure', 'Diagnostics', 'ESN Check', 'Printer', and 'Network'. The 'General' tab is selected. The settings are organized into several sections:


- Erasure warning settings:** A checkbox labeled 'Enable erasure warning dialog' is checked.
- Grid settings:** A checkbox labeled 'Show connected devices in the top' is checked. To its right, 'No of columns' is set to '8' in a dropdown menu. Below it, a checkbox labeled 'Fix grid' is unchecked, and 'Port identifier' has a 'Set' button next to it.
- Cloud report settings:** A checkbox labeled 'Auto send completed report to cloud' is checked.
- Delete local reports:** A dropdown menu shows '27/04/2022' and a 'Delete' button is to its right.
- Default Action:** Two radio buttons are present: 'Erase' (selected) and 'Diagnose'.
- Select default erasure method:** A dropdown menu shows 'Zeroes (1 Pass)'.
- Application Logs option:** A 'Select Media' dropdown menu is followed by a text box containing 'Click on 'Save' for saving logs into USB storage' and a 'Save' button.

At the bottom of the window, there are three buttons: 'Cancel', 'Apply', and 'OK'. A 'Manage Vendor List' button is also visible above the 'Apply' and 'OK' buttons.

The following fields can be edited from this section:


- **Erasure Warning Settings:**
 - **Enable Erasure Warning Dialog:** Check this field to enable the warning message before the initiation of the erasure process.

- **Grid Settings:** This option allows you to set the layout of the grid which is shown when we connect the devices.
 - **Column:** Allows you to predefine the number of columns in a grid.
 - **Port Identifier:** Allows you to predefine name of each port to identify the port easily. Click on **Set**. The popup window shows a list of USB ports. Type the name against each port in the **Identifier** column and click **OK** to save or **Cancel** to exit without saving:

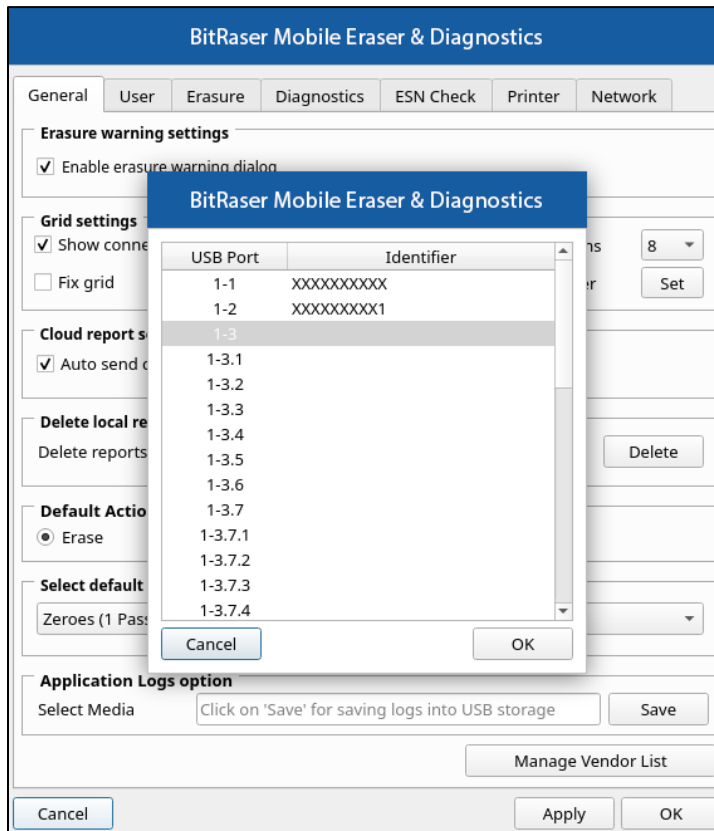

- **Show connected devices at the top of the grid:** Checking this field allows you to display the connected devices at the starting of the grid.
- **Fix Grid:** Checking this field allows you to fix the grid columns i.e., they cannot be moved.
- **Cloud Report Settings:**
 - **Auto send report to cloud:** Checking this field allows you to auto-send the report to the cloud.
- **Delete Local Reports:**
 - **Delete Reports before:** This option allows you to delete the reports before a certain date. Specify the date from the calendar and click the **Delete** button. All the reports generated before the selected date will be deleted.


- **Default Action:** Select a default option of **Erase** or **Diagnose**, when you connect a device to **BitRaser Mobile Eraser & Diagnostics**.
- **Select Default Erasure Method:** Select any one of the erasure methods from the drop-down options to set the default erasure method for all devices.
- **Application Logs option:** This option allows you to save the log files at the desired destination path. Click **Save Logs** to select the path of a USB device where the log file will be saved. After selecting the path, the log files are copied to the destination and a message appears as shown below, click **OK**.

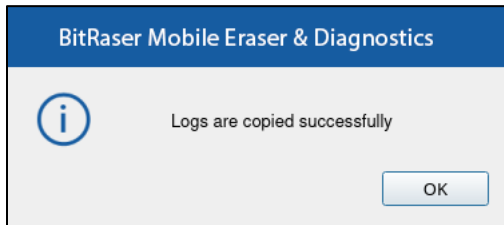

- **Manage Vendor List:** Click this button to add or list the mobile vendor manually, if mobile vendor is not recognized by the system.


Steps to add mobile vendors name manually:

- Click **Manage vendor list** located below right in the **General** tab.
- **Vendor List** screen appears, this screen is displayed list of mobile vendors name.

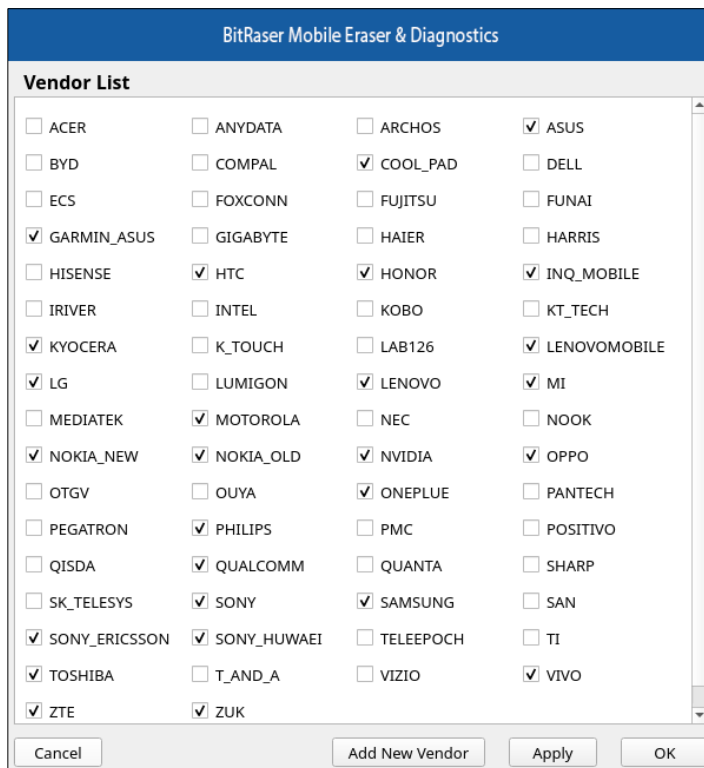

- Check mobile vendor name from this screen, if the vendor name is available check that checkbox and click **Apply** to list mobile vendor name in the main user interface.
- If mobile vendor name is not found in the **Vendor List** screen, click **Add New Vendor** button to add name of mobile vendor manually.
- **User Vendor List** screen appears. In **Add new Vendor** section, enter vendor **Name** and **ID**.

- Click **Add Vendor** button to list the vendor name in **User Vendor List** section.
Note: If you wish to delete any vendor from the **User Vendor List** section, click **Delete Added Vendor** button.
- **Vendor added** screen appears as shown below, click **OK** to continue.

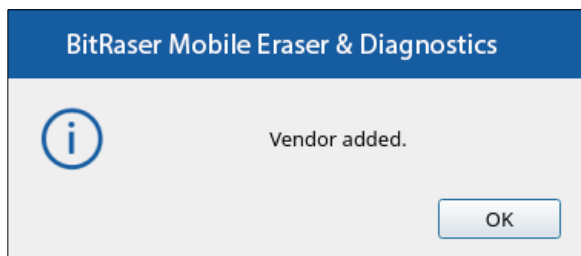


- After the vendor name is added under **User Vendor List**, click **OK** to continue further and **Cancel** to exit the screen.

Once the settings have been modified, click the **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu, **Cancel** closes the Settings menu without saving the changes.

2. User Settings:

User settings allow you to connect **BitRaser Mobile Eraser & Diagnostics** application to the **BitRaser Cloud**. Connection to **BitRaser Cloud** is required to acquire the license information and to initiate the erasure or diagnostic process.

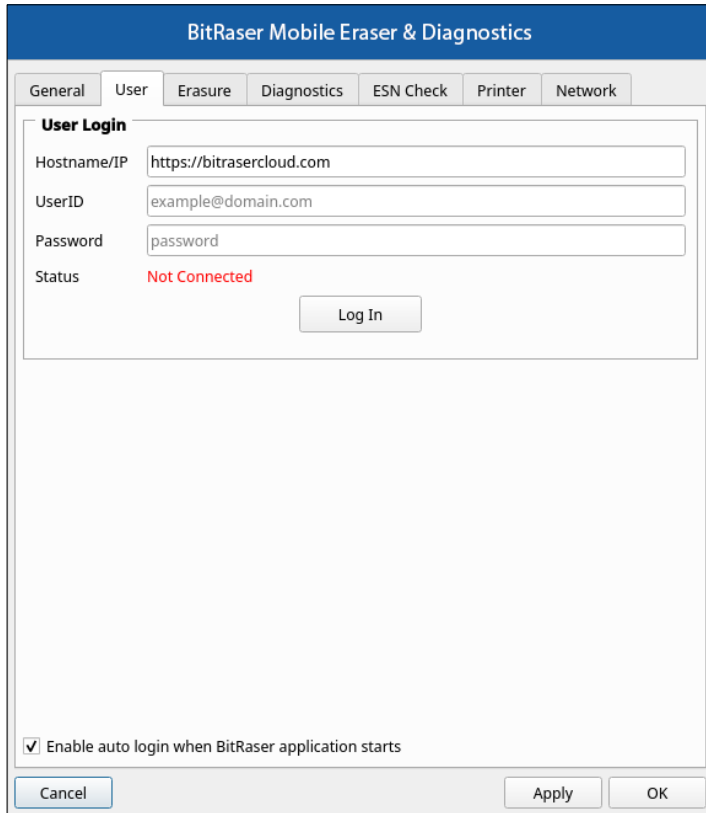

The screenshot shows the 'User Login' dialog box within the 'BitRaser Mobile Eraser & Diagnostics' application. The dialog has a blue title bar and several tabs: 'General', 'User', 'Erasure', 'Diagnostics', 'ESN Check', 'Printer', and 'Network'. The 'User' tab is selected. Inside the dialog, there are four input fields: 'Hostname/IP' with the value 'https://bitrasercloud.com', 'UserID' with 'example@domain.com', and 'Password' with 'password'. Below these fields is a 'Status' label that reads 'Not Connected' in red text. A 'Log In' button is positioned below the status. At the bottom of the dialog, there is a checkbox labeled 'Enable auto login when BitRaser application starts' which is checked. Three buttons are at the very bottom: 'Cancel', 'Apply', and 'OK'.

The following fields have to be filled:

FIELD NAME	DESCRIPTION
Hostname / IP	Hostname or IP address where the BitRaser Cloud Console is located.
UserID	UserID that is used to login to the BitRaser Cloud Console.
Password	Password which is used to login to the BitRaser Cloud Console.
Status	Connected: Shown when the connection to the BitRaser Cloud Console is active. Not Connected: Shown when there is no active connection to the BitRaser Cloud Console.

After you have entered the values in all the fields, click **Log In** to login to the **BitRaser Cloud Console**.

The screenshot shows the 'User Login' dialog box within the 'BitRaser Mobile Eraser & Diagnostics' application. The dialog has a blue header with the application name. Below the header are several tabs: 'General', 'User', 'Erasure', 'Diagnostics', 'ESN Check', 'Printer', and 'Network'. The 'User' tab is selected. The 'User Login' section contains the following fields and controls:

- Hostname/IP:** A text field containing 'https://beta.bitrasercloud.com'.
- UserID:** A text field with masked characters (dots).
- Password:** A text field with masked characters (dots).
- Status:** A label showing 'Connected' in green text.
- Log Out:** A button located below the status label.
- Enable auto login when BitRaser application starts:** A checkbox that is currently unchecked.

At the bottom of the dialog are three buttons: 'Cancel', 'Apply', and 'OK'.


Checking **Enable auto login when BitRaser Mobile Eraser & Diagnostics starts** option allows you to automatically login to the **BitRaser Cloud Console** when you start **BitRaser Mobile Eraser & Diagnostics** application.

Once the settings have been modified, click **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu, **Cancel** closes the Settings menu without saving the changes.

3. Erasure Settings:

The Erasure setting tab has the following two sub-tabs:

A. iOS Settings:

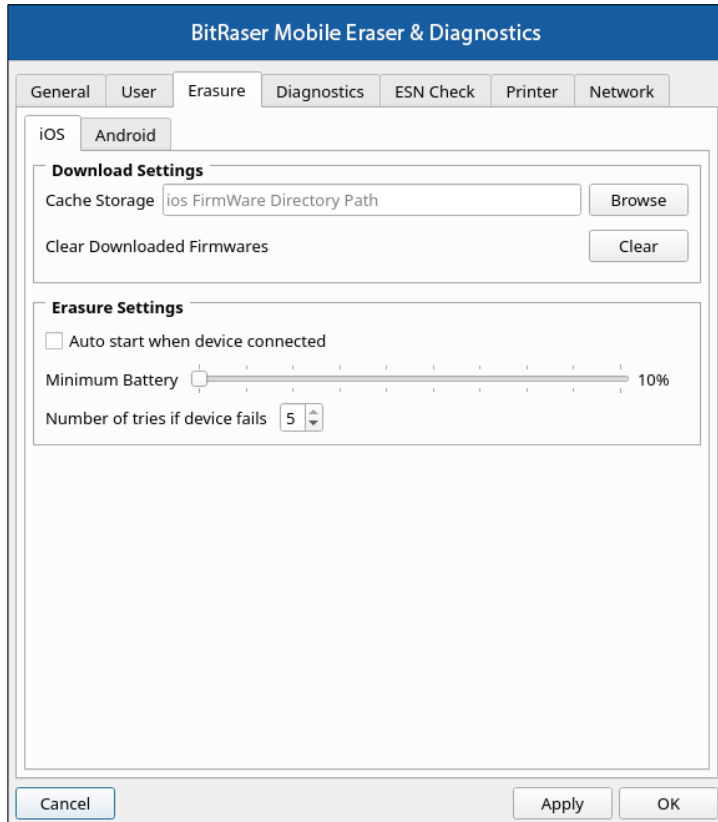

The iOS settings tab displays the firmware download and erasure settings. The following fields can be edited from this section:

- **Download Settings:**
 - **Cache Storage:** This option allows you to select the desired location where the firmware is located. Click **Browse** button and specify the path using **Look In** dialog box. After selecting the path, click **OK**.
 - Click **Clear** button to remove the downloaded iOS firmware from your hard drive.

- **Erasure Settings:**


It has minimum battery and number of trials parameter which must be defined to erase the data:

- **Minimum Battery:** You can define the minimum battery percentage using the slider. This represents the minimum battery required to erase the device's data. For example: If you set the slider to 20 % it means that at least 20% battery should be there in your device for the Erase process to take place.

- **Number of tries if the device fails:** Allows you to define the maximum amount of retries/attempts for the erasure process to start if in case the device is disconnected/removed in the middle of the erasure process.

Once the settings have been modified, click **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu, **Cancel** closes the Settings menu without saving the changes.

B. Android Settings:

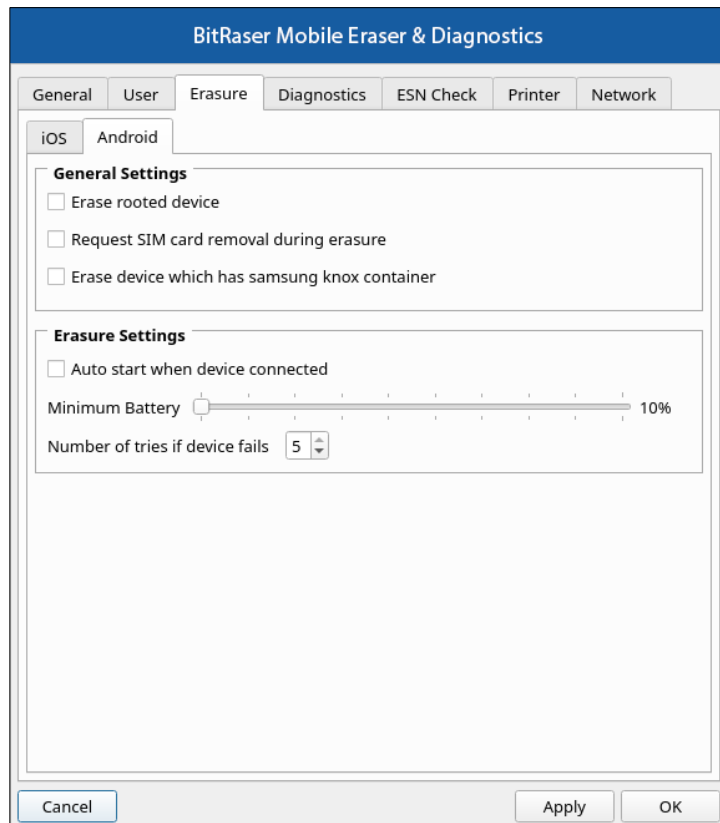

The Android settings tab displays general and erasure settings. The following fields can be edited from this section:

- **General Settings:**
 - **Erase rooted device:** Checking this option allows you to erase an Android device even if it is rooted.
 - **Request SIM card removal during erasure:** Checking this option will show a message to remove the SIM card from the device before the erasure process starts.
 - **Erase device which has Samsung Knox container:** Checking this option allows you to erase an Android device that has a Samsung Knox container.

- **Erasure Settings:**

It has minimum battery and number of trials parameter which must be defined to erase the data:

- **Minimum Battery:** You can define the minimum battery percentage using the slider. This represents the minimum battery required to erase the device's data. For example: If you set the slider to 20% it means that at least 20% battery should be there in your device for the Erase process to take place.
- **Number of tries if the device fails:** Allows you to define the maximum amount of retries/attempts for the erasure process to start if in case the device is disconnected/removed in the middle of the erasure process.

Once the settings have been modified, click **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu, **Cancel** closes the Settings menu without saving the changes.


4. Diagnostic Settings:

The Diagnostic setting tab has the following two sub-tabs:

- **iOS Settings:**



- **Android Settings:**

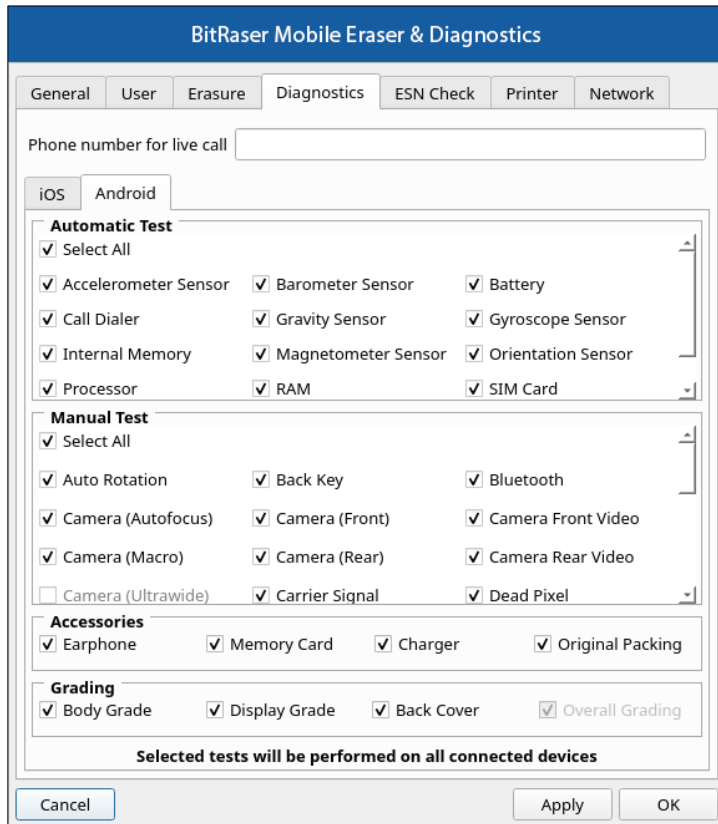


These tabs have lists of automatic tests, manual tests, accessories, and grading options. The tests which are checked will be performed on the connected devices.

Once the settings have been modified, click **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu, **Cancel** closes the Settings menu without saving the changes.

5. ESN Check:

An ESN (Electronic Serial Number) check detects whether a phone is stolen, lost, or blacklisted. Using this tab you can choose a appropriate option for ESN check while performing Erasure/Diagnostics process.

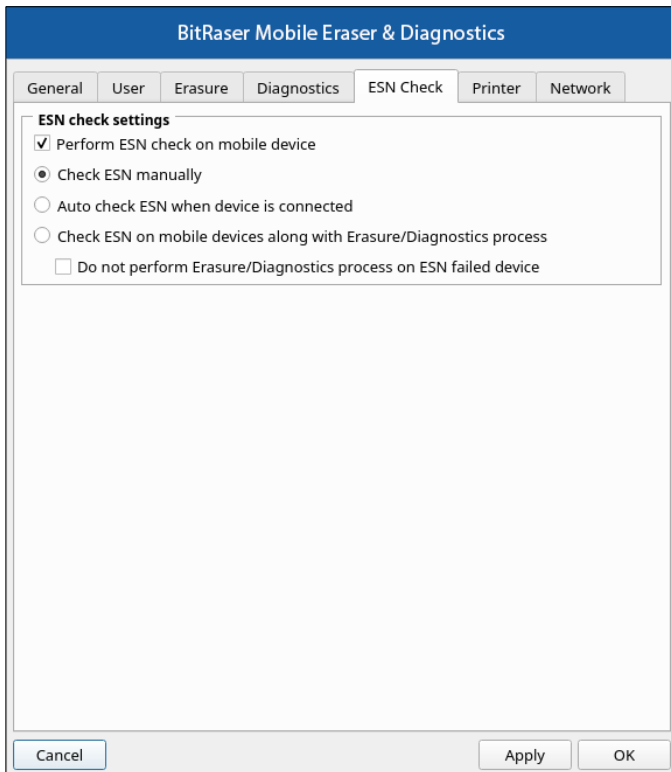

The following fields can be selected from ESN check setting sections:

- **Perform ESN check on mobile device:** Check this field to enable the following options to perform ESN check on selected mobile devices.
 - **Check ESN manually:** Select this option to check the ESN status manually.
 - **Auto check ESN when device is connected:** Select this option to check the ESN status automatically, when the mobile devices is plugged-in.
 - **Check ESN on mobile devices along with Erasure/Diagnostics process:** Choose this option, if you want ESN to be checked automatically while performing Erasure/Diagnostics.
 - **Do not perform Erasure/Diagnostics process on ESN failed device:** Select this checkbox if you do not want to perform Erasure/Diagnostics process on ESN failed devices.


Once the settings have been modified, click the **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu, **Cancel** closes the Settings menu without saving the changes.

6. Printer Settings:

This option allows you to print the information on the connected devices.


It has the following two tabs:

A. Printer:

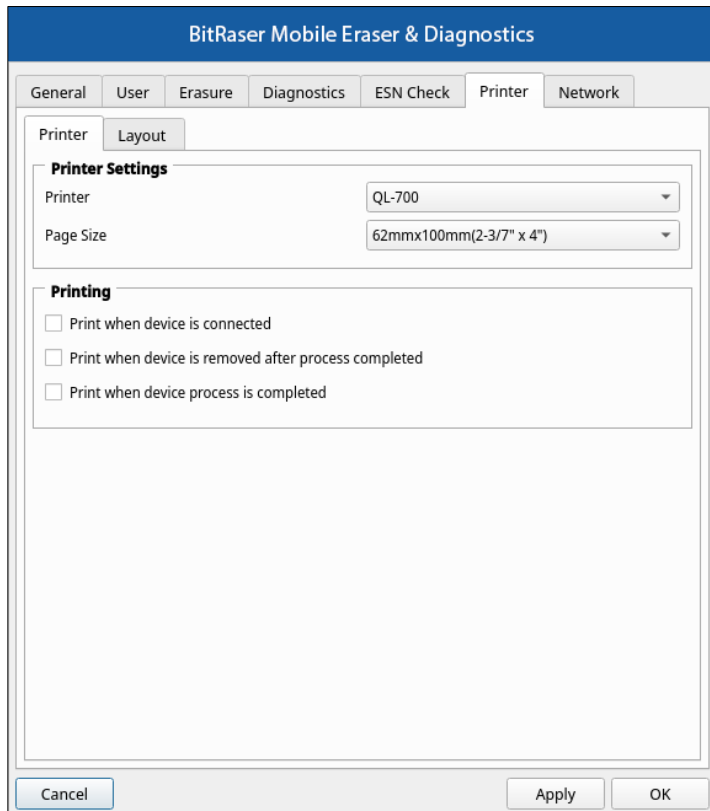

- **Printer Settings:**
 - **Printer:** Allows you to select a printer from the drop-down list.
 - **Page Size:** Choose the appropriate paper size from the drop-down list that you can print on.
- **Printing:**
 - To generate a print when you connect the device, select the option **Print when device is connected**.
 - To generate a print when you disconnect the device after the erasure or diagnostic process, select the option **Print when device is removed after process completed**.
 - To generate a print when the erasure or diagnostic process is completed, select the option **Print when device process is completed**.

B. Layout:

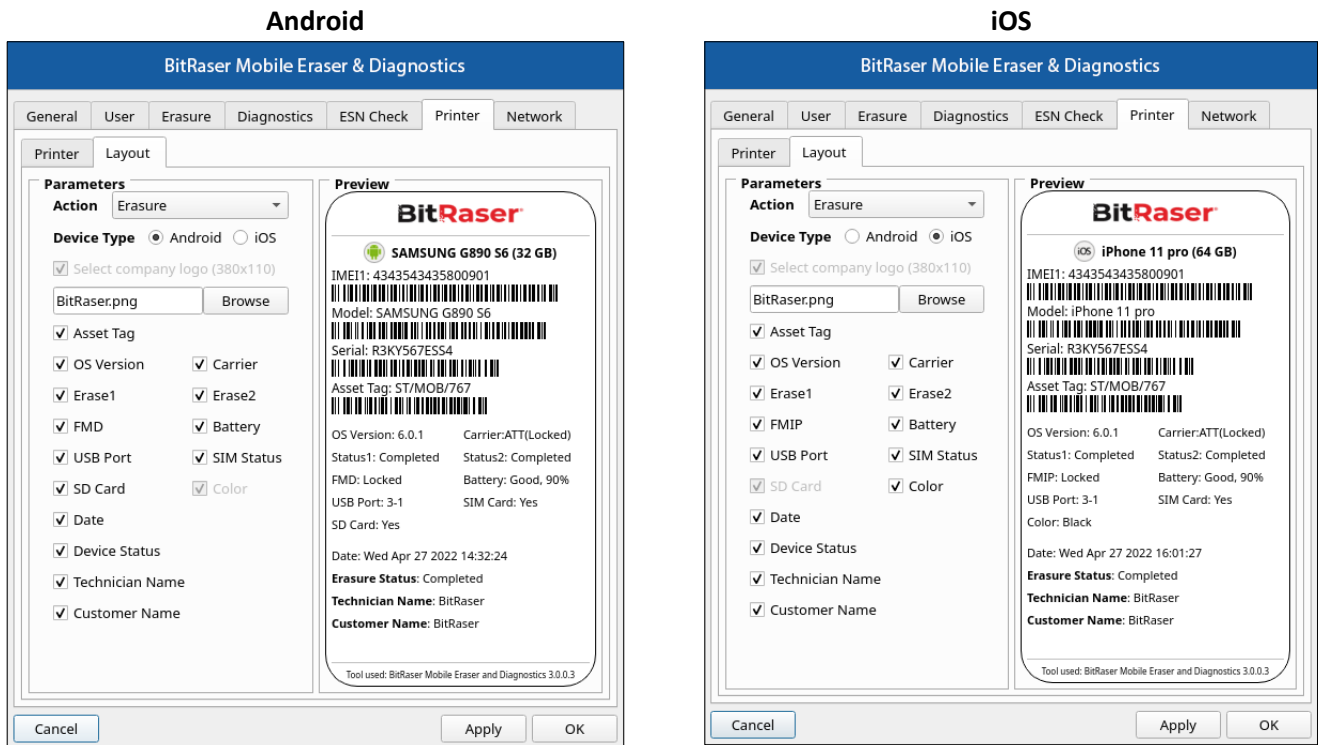

The layout tab allows you to select a list of parameters such as Action (Erasure or Diagnostics), Device Type (Android or iOS), Company Logo, Asset Tag, OS Version, and so on, for printing the device label. It also shows you the print preview of the label with all the device details selected by you.

Once the settings have been modified, click **Apply** button to save the changes. **OK** applies all the changes to the software and closes the Settings menu; **Cancel** closes the Settings menu without saving the changes.

7. Network Settings:


The Network settings have been defined in the [Connecting to the Internet](#) section of this help guide.

3.2. ERASURE PROCESS

You can securely erase data from your device by using the erasure feature of **BitRaser Mobile Eraser & Diagnostics**. You can choose an erasure method from a list of 11 data erasure methods.

To erase data using **BitRaser Mobile Eraser & Diagnostics**:

1. Run **BitRaser Mobile Eraser & Diagnostics**. Plug the iOS/Android device into the computer.
2. The **Devices** tab (which is selected by default) lists all the attached iOS/Android devices. The screen which appears is displayed below:

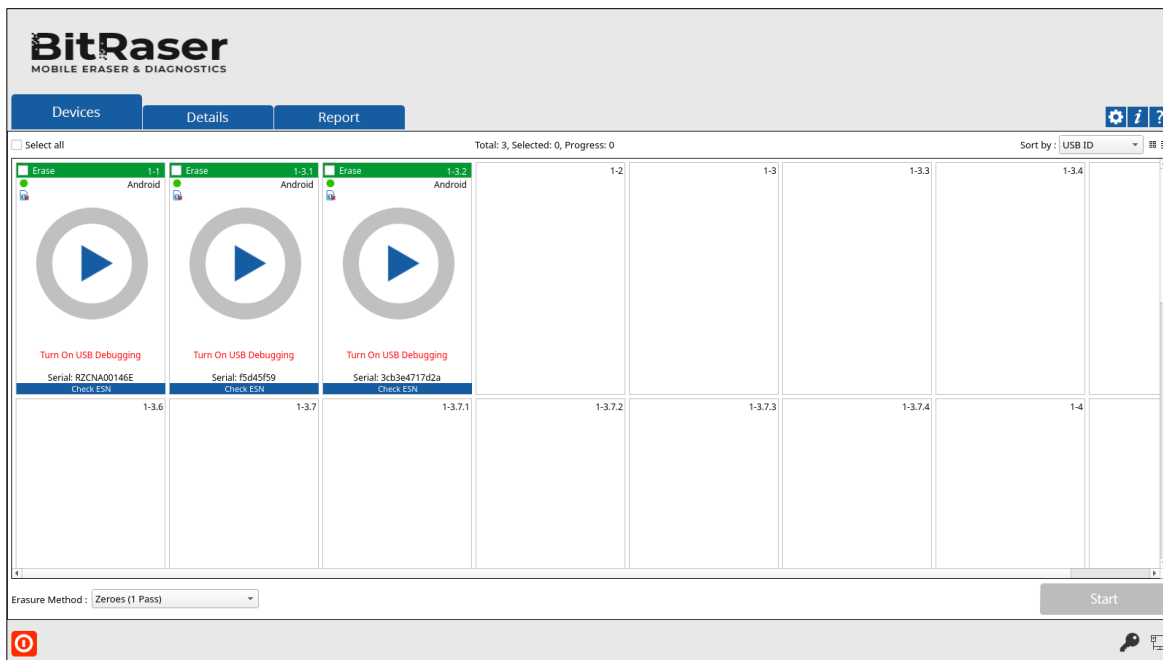


A device message appears after its connection. **For example:** In the above screen, an Android device shows the message '**Turn On USB Debugging**'. To continue from this stage, USB Debugging must be allowed on the Android device's end. Similarly, for iOS devices '**Trust Device**' message appears.

Note: For more information, please refer to the section '[How to enable the USB Debugging mode in your phone?](#)' in the next topic of this user guide.

3. All the devices along with their information like process (**Erase** or **Diagnose**), USB port name, type, progress bar, status, ECID/IMEI, and serial number are displayed. You can also see icons for connectivity status, SIM card status, and FMD (Find my device) locked/unlocked status.


Note: If you wish to change the process (**Erase** or **Diagnose**), click on the **Diagnose** (header area in orange color) to change the process to **Erase** (header area in green color) and vice versa.

Note: If you wish to check the ESN status of the mobile device prior to **Erase** process, click on the **ESN check** (Footer area in blue color). For more information on how to make prior settings for this feature, see [ESN check](#).

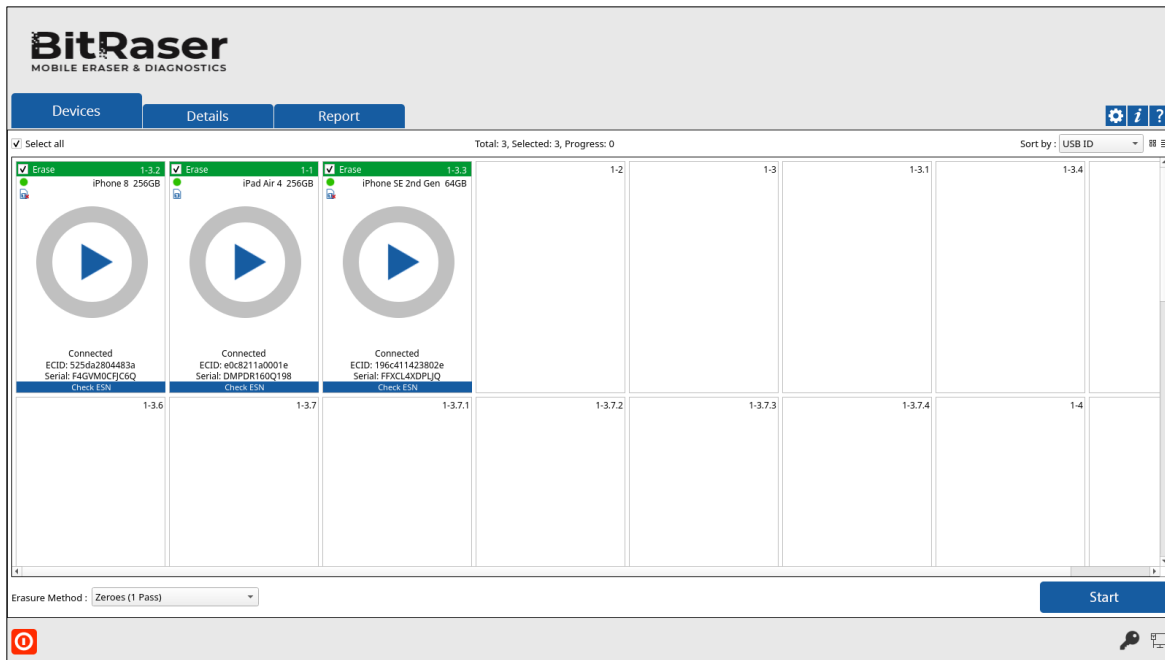


4. You can preview the device's information either in **Grid view**  or **List view** .

- In the **Grid view**, the devices get displayed in a grid-like structure, and also the devices can be sort using the **Sort By** option. The **Sort By** option allows sorting the devices based on the following information/criteria: USB ID, Name, Serial Number, Type, Size, ECID/IMEI, and Status.

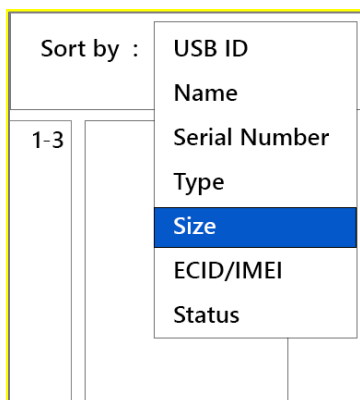


- In the **List view**, the devices get displayed in a list.

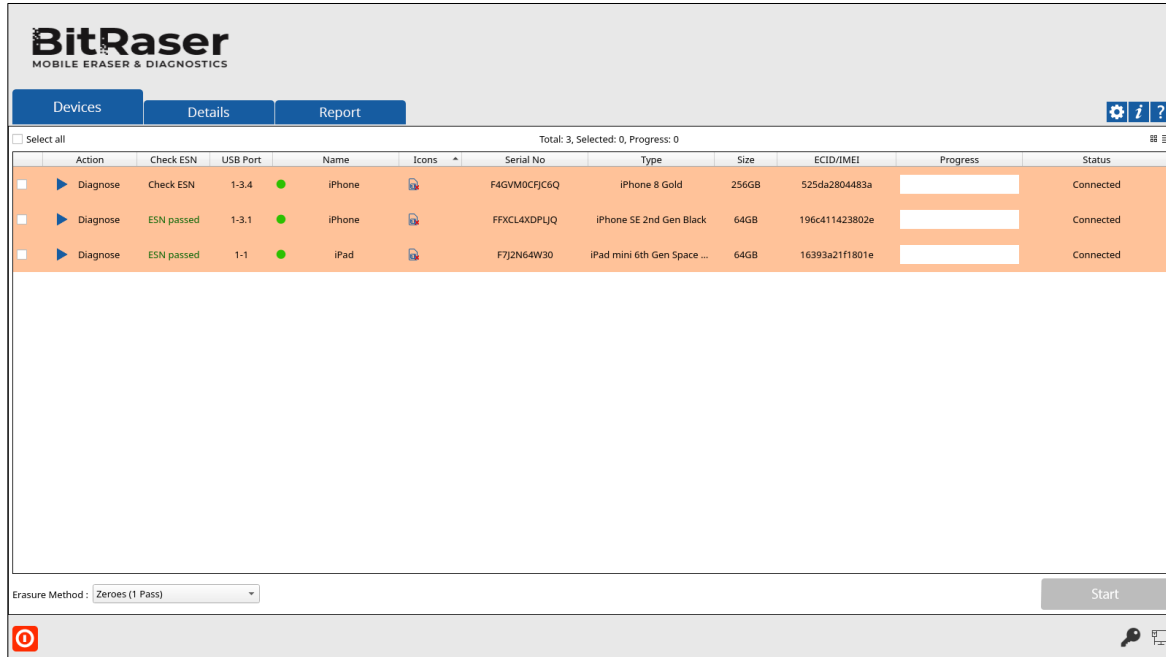

5. Double-clicking on any of the displayed devices will show the device information of the corresponding device. These details can be printed by clicking on the **Print Label** button.



6. From the dialog that appears, click on **USB ID** to change the identifier for the USB port. Click **OK**.

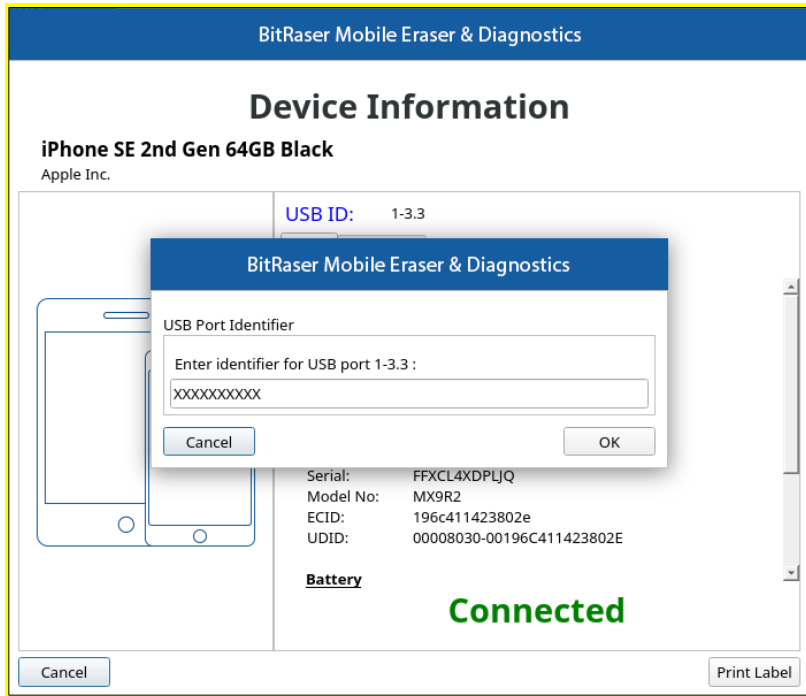

7. Select the devices to erase by marking the check-box before every device.

Note: Mark **Select All** option to select every listed device for erasing.

8. From the bottom of the screen, select any one of the following erasure methods:


ERASURE METHODS	DESCRIPTION
Native OS Erasure	This is the default algorithm available to the users in the device's OS.
Zeroes	This algorithm wipes data by overwriting it with zeros in a single pass. This is the fastest algorithm available to a user.
Pseudo-random (2 passes)	This algorithm wipes data by overwriting an entire device with randomly generated numbers in a single pass.
US Department of Defense, DoD 5220.22-M (3 passes)	This algorithm wipes data by overwriting the device in three passes. In the first pass, it overwrites data with zeros, then in the second pass, it overwrites the data with ones, and finally in the third pass overwrites the data with randomly generated bytes. This is a U.S. Department of Defense algorithm.
US Department of Defense, DoD 5200.22-M (ECE) (7 passes)	This algorithm wipes data by overwriting the device in seven passes. The first, fourth, and fifth pass are overwriting with a random byte, its 8 right-bit shift complement, and 16 right-bit shift complement; second and sixth passes are overwriting with zeros, and third and seventh pass with random data. This is a U.S. Department of Defense algorithm.

B.Schneier's algorithm (7 passes)	This algorithm wipes data in seven passes. In the first two passes, it overwrites the device with ones and then zeros, and in the next five passes, it overwrites data with random characters.
Peter Gutmann (35 passes)	This algorithm wipes data by overwriting it 35 times, making recovery of the wiped data by any tool impossible. This algorithm takes more time than other wiping algorithms.
US-Army AR 380-19 (3 passes)	This algorithm wipes data by overwriting the media in three passes. In the first pass, it overwrites data with random bytes, then in the second and third pass, it overwrites data with certain bytes and their complements. This is a U.S. Army algorithm.
US Air Force, AFSSI 5020(3 passes)	This algorithm wipes data by overwriting the media in three passes. First, it overwrites with zeros, then with ones, and finally with random characters.
British HMG IS5 (3 passes)	This algorithm is a three pass overwriting algorithm, first pass - with zeros, the second pass—with ones and the last pass with random data.

9. Click **Start** to start erasing the devices.

Note: *If you wish to erase a single device, you can start the process by simply clicking the play button in the middle.*

10. A warning message appears asking to proceed to the erasure process. Click **Proceed**.

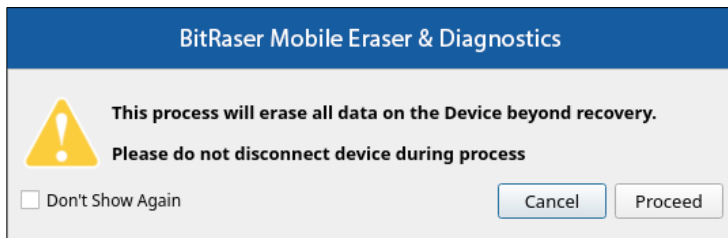

Note: *If you do not wish to see the warning message the next time you erase a device, mark **Don't Show Again** check-box.*

Note: *At this stage, **BitRaser Mobile Eraser & Diagnostics** acquire license information from **BitRaser Cloud**, and licenses are consumed depending upon the number of devices you have selected for erasure. Therefore, you need an active internet connection to start the erasing process.*

The erase process for a device takes place in five different phases, to understand these phases refer to the next section of [Erasure Stages](#).


3.2.1. ERASURE STAGES

Before the completion of the erasure process, a series of steps take place while we erase a device. The erasure stages are as follows:


1. [Device Connection](#)
2. [Initialization](#)
3. [Firmware Downloading](#)
4. [Restoration](#)
5. [Erasure](#)

Caution: Make sure you do not interrupt the process by disconnecting the device or pressing the power button at any stage. Doing so might fail the process and harm your device.


1. Device Connection: In this stage, the connection of the iOS/Android device which you want to erase is established.

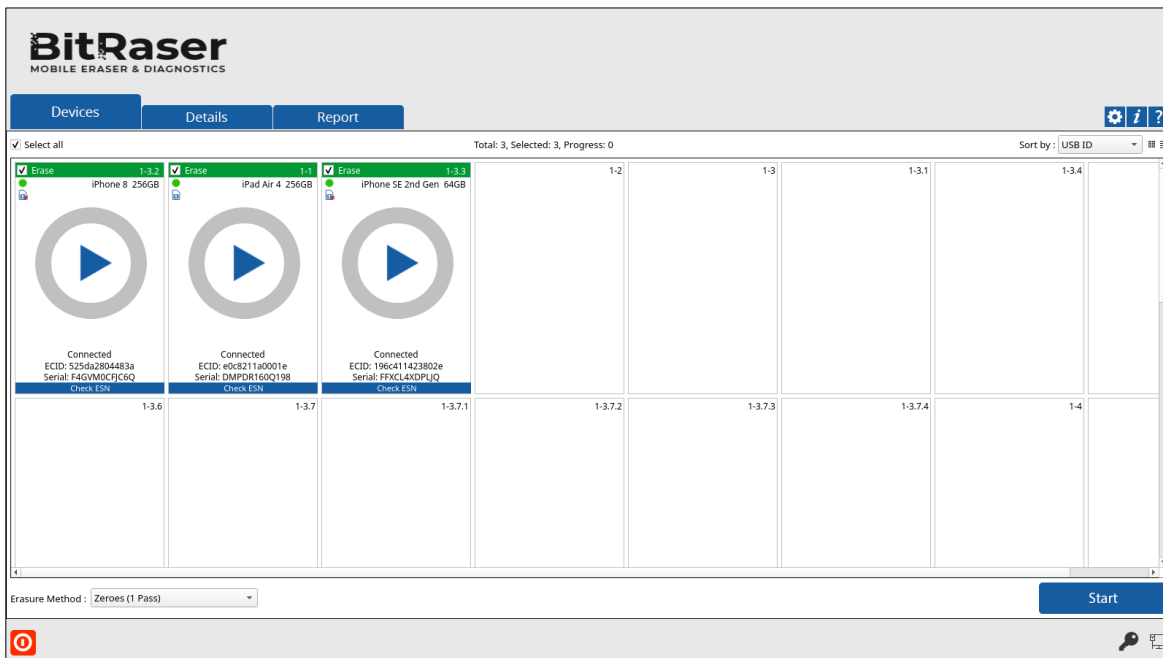

2. Initialization: In the initialization phase, the application starts analyzing the device you have connected. In case you have connected multiple devices, the application lists Device Status, Device Type, ECID/IMEI, and Serial Number of the connected devices. **The erasure is also possible in case if the device gets into Recovery mode.**

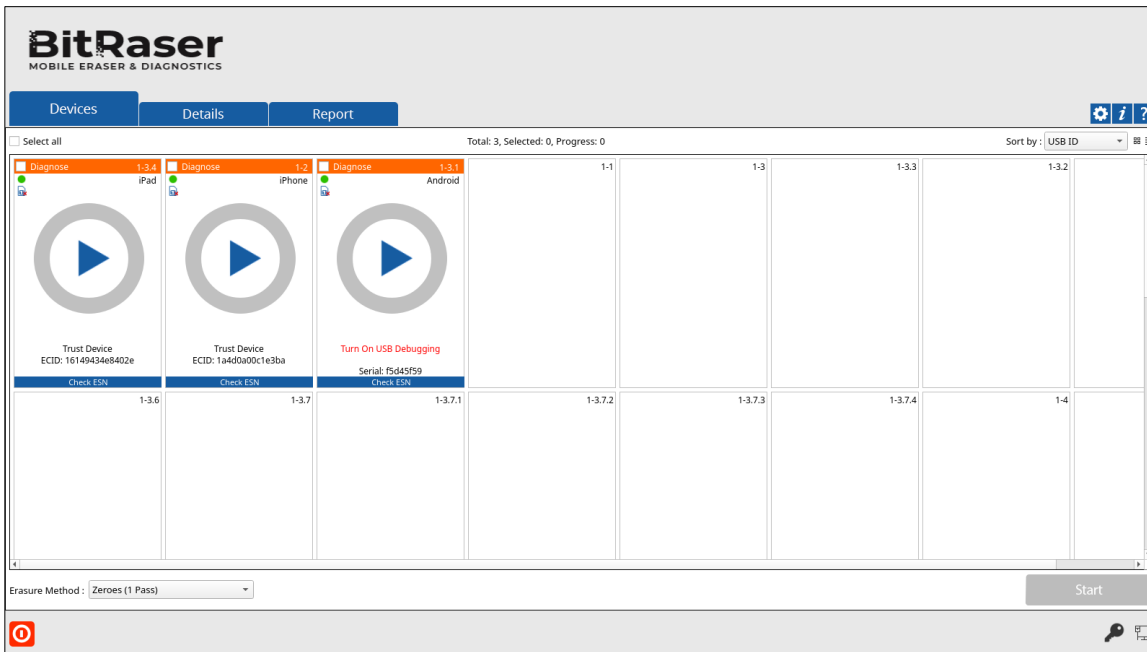


3. Firmware Downloading: Before the start of the erasure process for iOS devices, the firmware downloading process begins. In case, the firmware is already downloaded, the firmware's version will be checked and then the restoration process begins immediately. The percentage of download completed is displayed in a circular progress bar. If multiple devices are connected at a time, all of them show that their firmware is being downloaded.

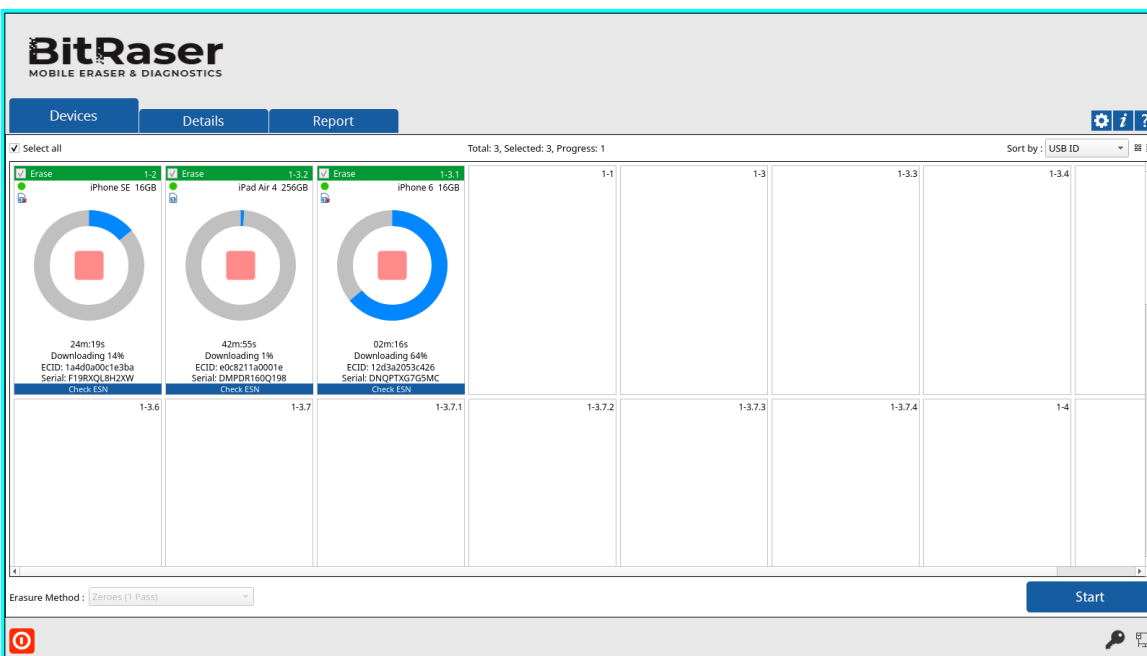



Note: For Android devices, the erasure will start immediately after the Initialization phase.

4. Restoration: When the firmware downloading for the iOS devices gets complete, the firmware restoration process starts. Restoring your iOS device puts it into an almost completely factory-reset state that includes the erasure of all data. A 'Restoring Completed' text appears after its successful completion.

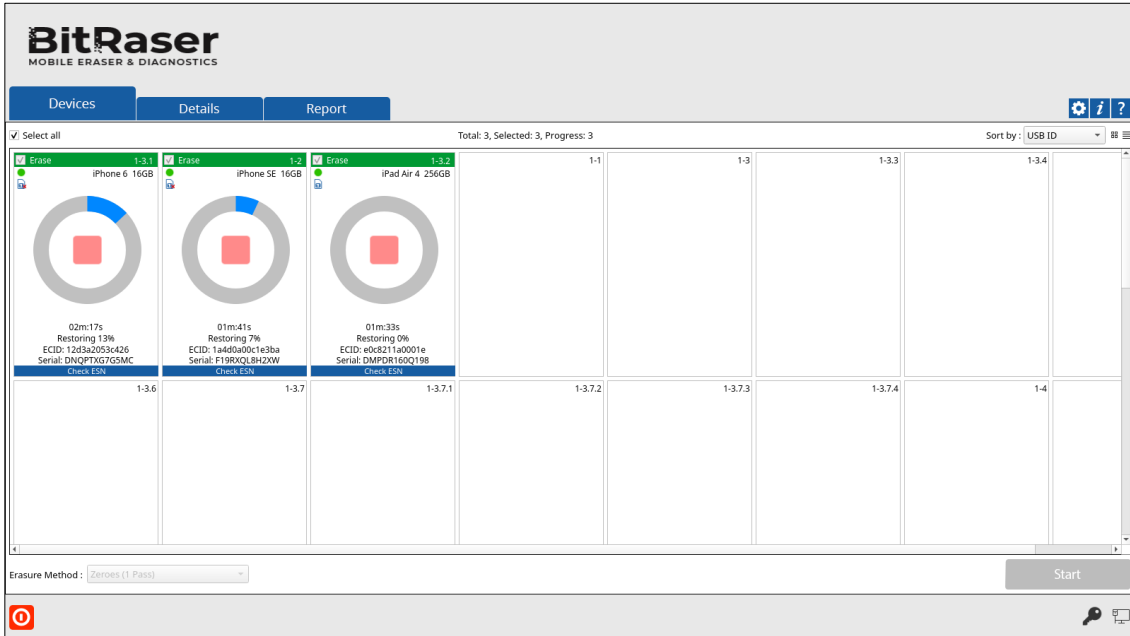


5. Erasure: The erasure process starts immediately after the completion of the restoring procedure. When the erasure is successfully completed, the icon displays a green color with the text '**Completed**'. The icon displays a red color with the text '**Failed**' in case of erasure failure.

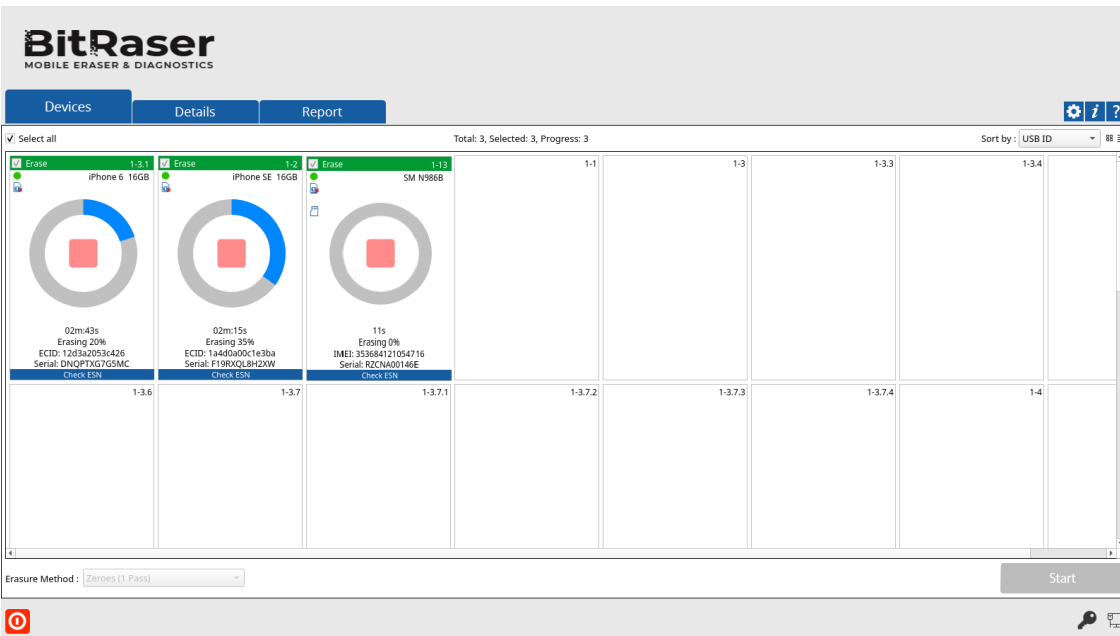

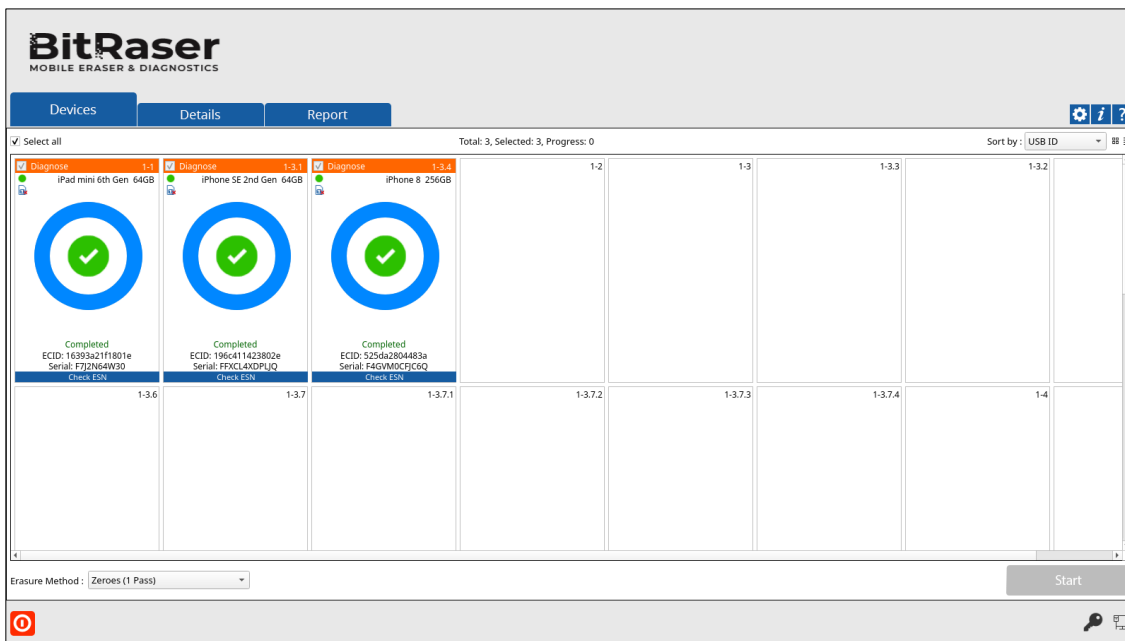


You can view the progress of the erasure process at any time during the process by double-clicking on the device and clicking on the **Progress** tab from the **Device Information** dialog that opens:

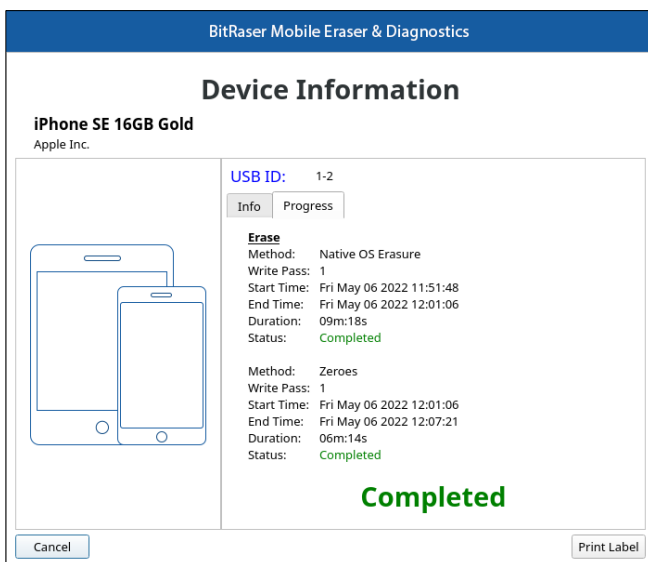

Things to Note:

- Before the onset of the erasure process on an android device, the [USB Debugging](#) must be in ENABLE mode for the device you are connecting.
- When you install **BitRaser Mobile Eraser & Diagnostics** on a device running Android OS, you control which capabilities or information **BitRaser Mobile Eraser & Diagnostics** can access-known as **Permissions**. For example, an application might want permission to see your device contacts or location. You can control which permissions an application can access after the application installs on your device.

The application prompts the user to **Allow Permissions** on an **Android** device. Proceed to this process to further permit the access of photos, media, files, and phone calls.

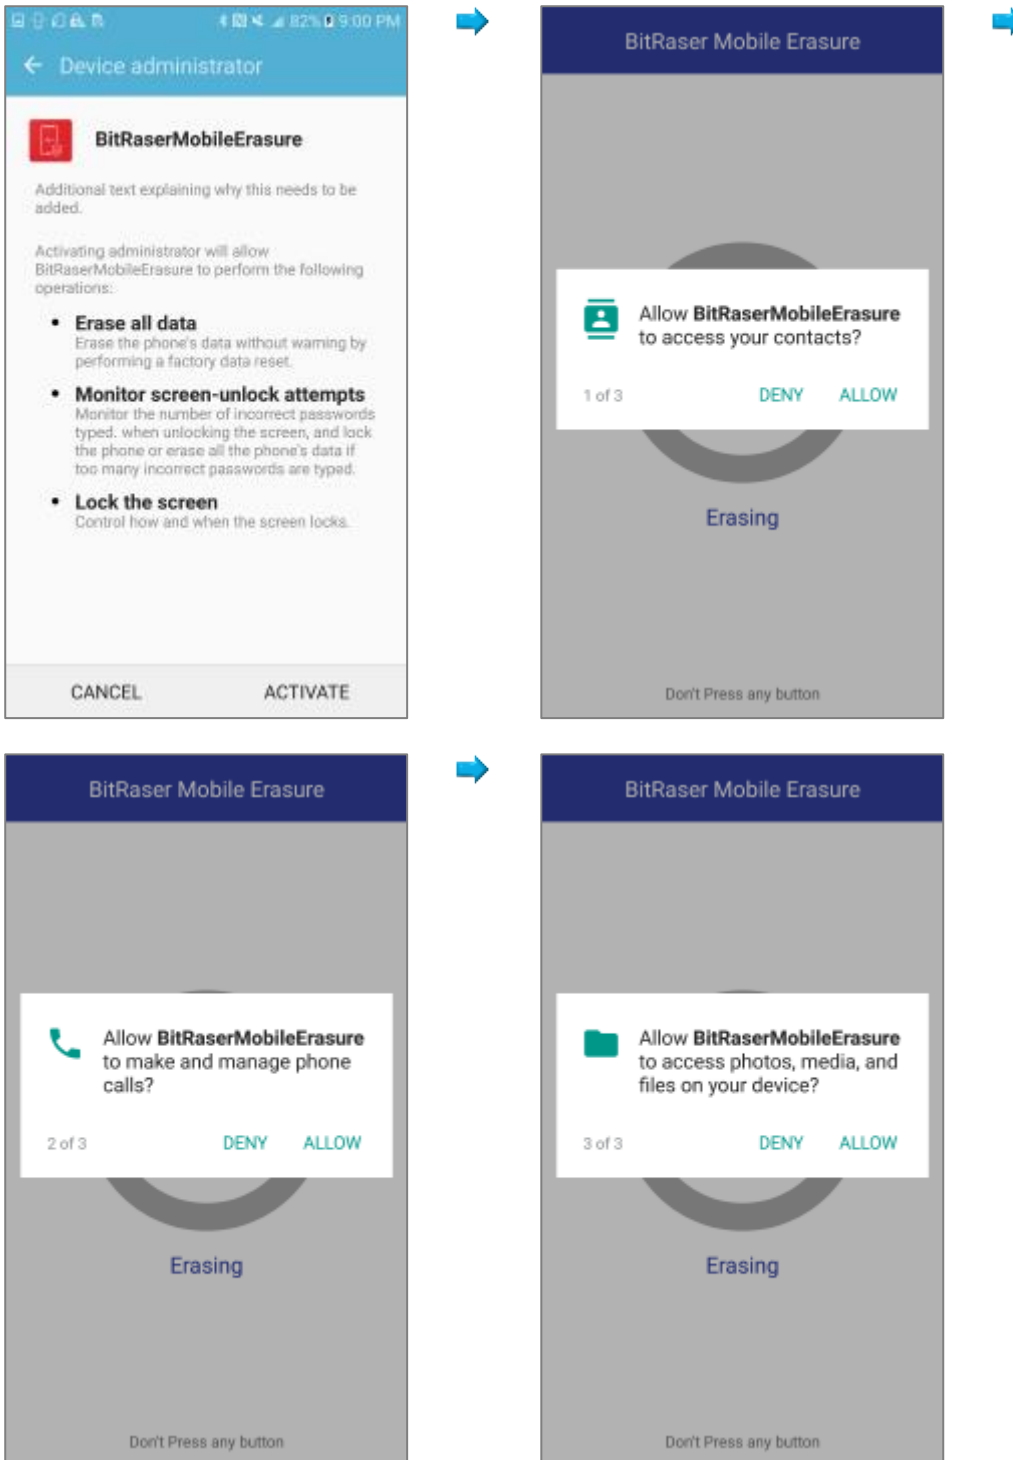

Note: Keep in mind turning off permissions may cause **BitRaser Mobile Eraser & Diagnostics** on your device to lose functionality.

How to Enable the USB Debugging Mode on Your Phone?


1. Go to settings in your android device and click “**About device**” option.
2. Select “**Software info**” from the about device page.
3. Tap the **Build number** eight times to make **Settings > Developer Options** available.
4. Go back to the setting page and scroll down until you see “**Developer Options**”. Select **Developer Options**.
5. On the Developer Options page scroll down and enable **USB Debugging**.

3.3. DIAGNOSTIC PROCESS

You can diagnose your device by using the diagnose feature of **BitRaser Mobile Eraser & Diagnostics**.

To diagnose a device using **BitRaser Mobile Eraser & Diagnostics**:

1. Run **BitRaser Mobile Eraser & Diagnostics**. Plug the iOS/Android device into the computer.
2. The **Devices** tab (selected by default) lists all the attached iOS/Android devices. The screen which appears is displayed below:

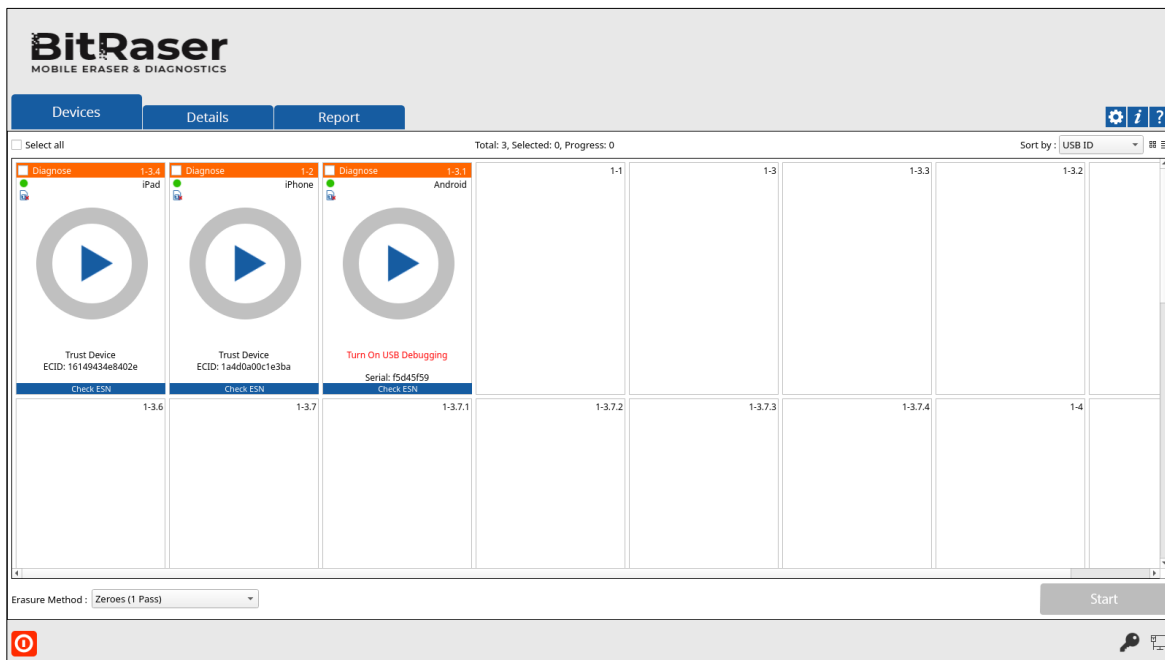

A device message appears after its connection. **For example:** In the above screen, an Android device shows the message **'Turn On USB Debugging'** and iOS device shows **'Trust Device'**. To continue from this stage, USB Debugging must be allowed on the Android device's end and Trust Device must be allowed on the iOS device's end.

Note: For more information, please refer to the section ['How to enable the USB Debugging mode in your phone?'](#) in the next topic of this user guide.


3. All the devices along with their information like process (**Erase** or **Diagnose**), **USB port name, type**, progress bar, status, ECID/IMEI, and serial number are displayed. You can also see icons for connectivity status, SIM card status, and FMD (Find my device) locked/unlocked status.

Note: If you wish to change the process (**Erase** or **Diagnose**), click on the **Erase** (header area in green color) to change the process to **Diagnose** (header area in orange color) and vice versa.


Note: If you wish to check the ESN status of the mobile device prior to **Diagnose** process, click on the **ESN check** (Footer area in blue color). For more information on how to make prior settings for this feature, see [ESN check](#).

4. You can preview the device's information either in a **Grid view** or **List view**.


- In the **Grid view**, the devices get displayed in a grid-like structure, and also the devices can be sort using the **Sort By** option. The **Sort By** option allows sorting the devices based on the following information/criteria: USB ID, Name, Serial Number, Type, Size, ECID/IMEI, and Status.

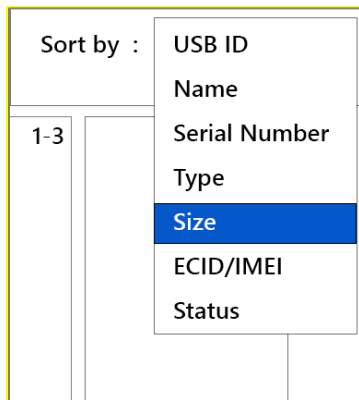


- In the **List view**, the devices get displayed in a list.

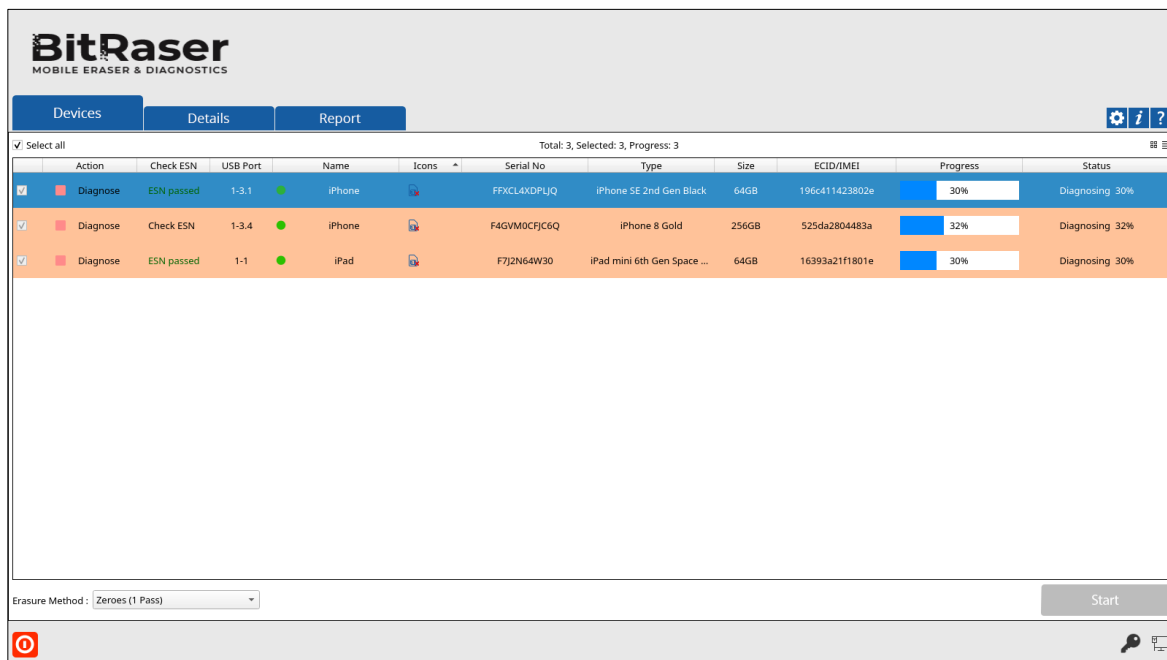

5. Clicking on any of the following devices will show device information of the corresponding device. These details can be printed by clicking on the **Print Label** button.

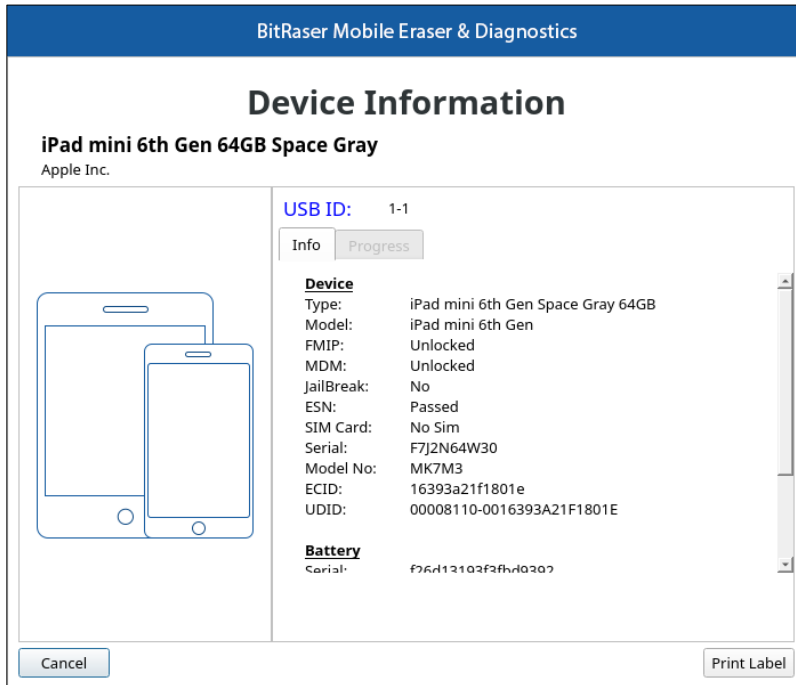


6. From the dialog that appears, click on **USB ID** to change the identifier for the USB port. Click **OK**.

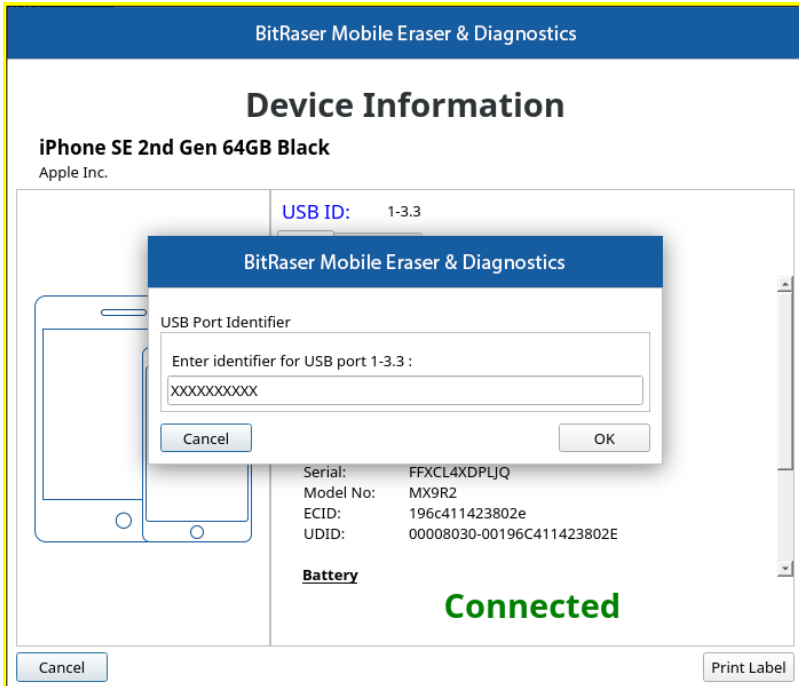

7. Select the devices to diagnose by marking the check-box before every device.

Note: Mark **Select All** option to select every listed device for diagnosing.

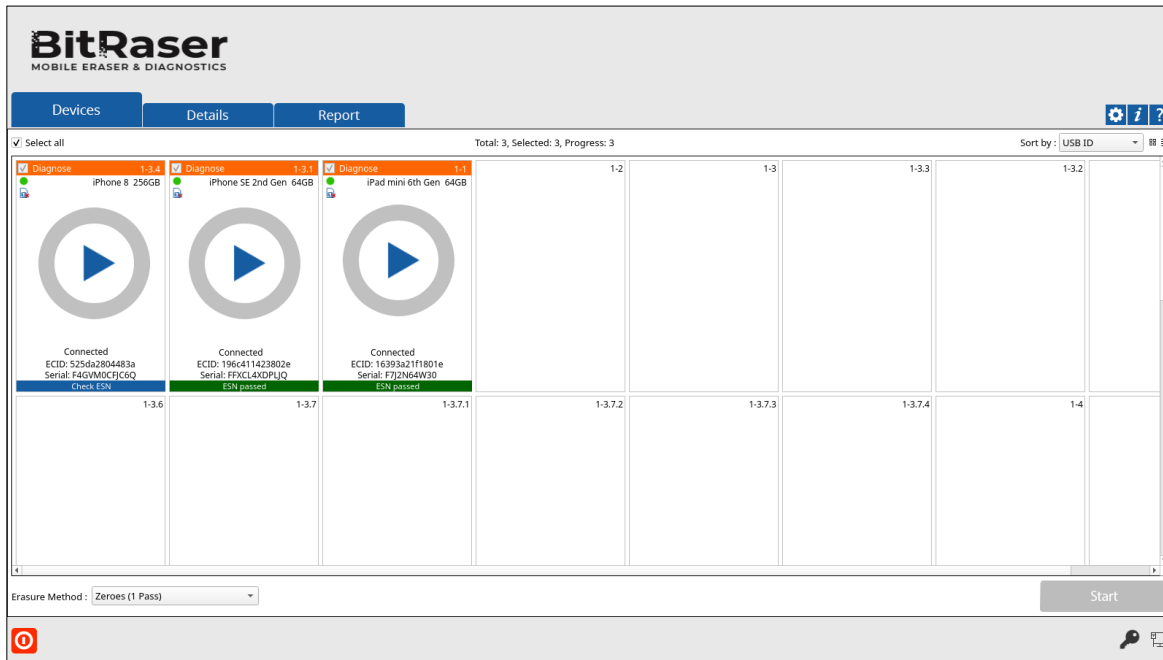

8. Click **Start** to start diagnosing the device.

Note: If you wish to diagnose a single device, you can start the process by simply clicking the play button in the middle.

Note: At this stage, **BitRaser Mobile Eraser & Diagnostics** acquire license information from **BitRaser Cloud**, and licenses are consumed depending upon the number of devices you have selected for diagnostics. Therefore, you need an active internet connection to start the diagnostic process.

Tip: It is recommended to enable **Bluetooth**, **GPS (location services)**, and **Wi-Fi** on your device before starting the diagnostic process, to diagnose these services on your device.

Note: On your **iOS** device, make sure you have enabled the **Bluetooth** from the **Control Centre** of your device. This is required to diagnose the **Bluetooth** service successfully.

The diagnostic process for a device takes place in five different phases, to understand these phases refer to the next section of [Diagnostic Stages](#).


3.3.1. DIAGNOSTIC STAGES

Before the completion of the diagnostic process, a series of steps take place while we diagnose a device. The diagnostic stages are as follows:

1. [Device Connection](#)
2. [Initialization](#)
3. [Automatic Diagnostic Tests](#)
4. [Manual Diagnostic Tests](#)
5. [Accessories and Grading](#)

Caution: Make sure you do not interrupt the process by disconnecting the device or pressing the power button at any stage. Doing so might fail the process and harm your device.


1. Device Connection: In this stage, the connection of the iOS/Android device that you want to diagnose is established.

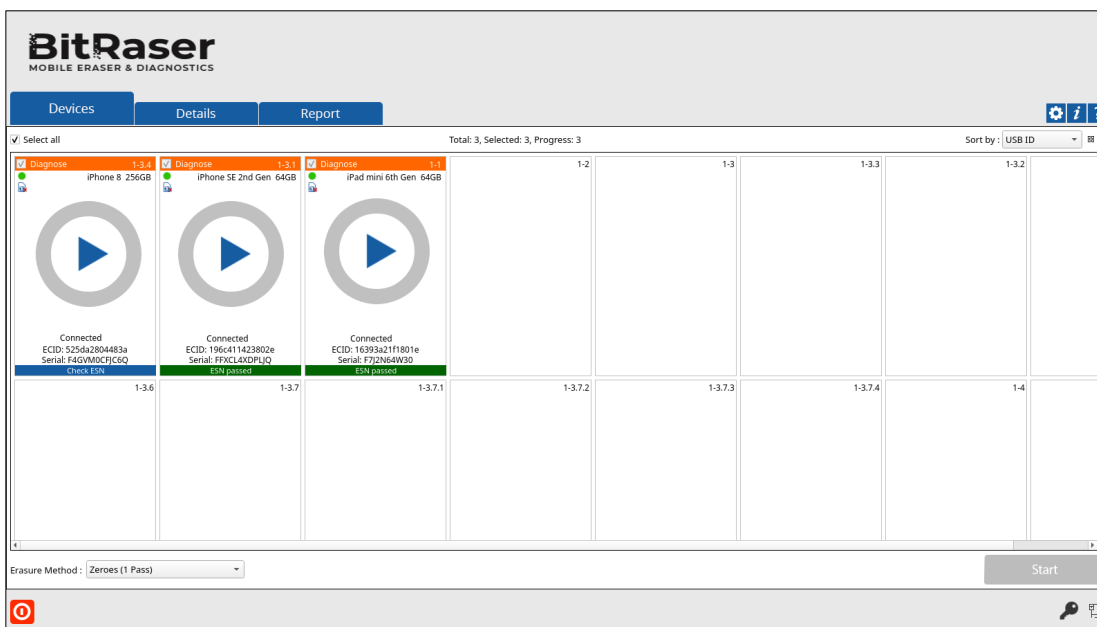


2. Initialization: In the initialization phase, the application starts analyzing the device you have connected. In case you have connected multiple devices, the application lists Device Status, Device Type, ECID/IMEI, and Serial Number of the connected devices.

The application prompts the user to **Install App from device** for **Redmi** devices and **Allow Permissions** on other android devices. Proceed to this process on the device as required by the application.


Note: For **Redmi** devices, you need to install a **BitraserMobileDiagnostics.apk** on your phone. See [Procedure to install BitraserMobileDiagnostics.apk on Redmi Phone](#) to know the required steps.

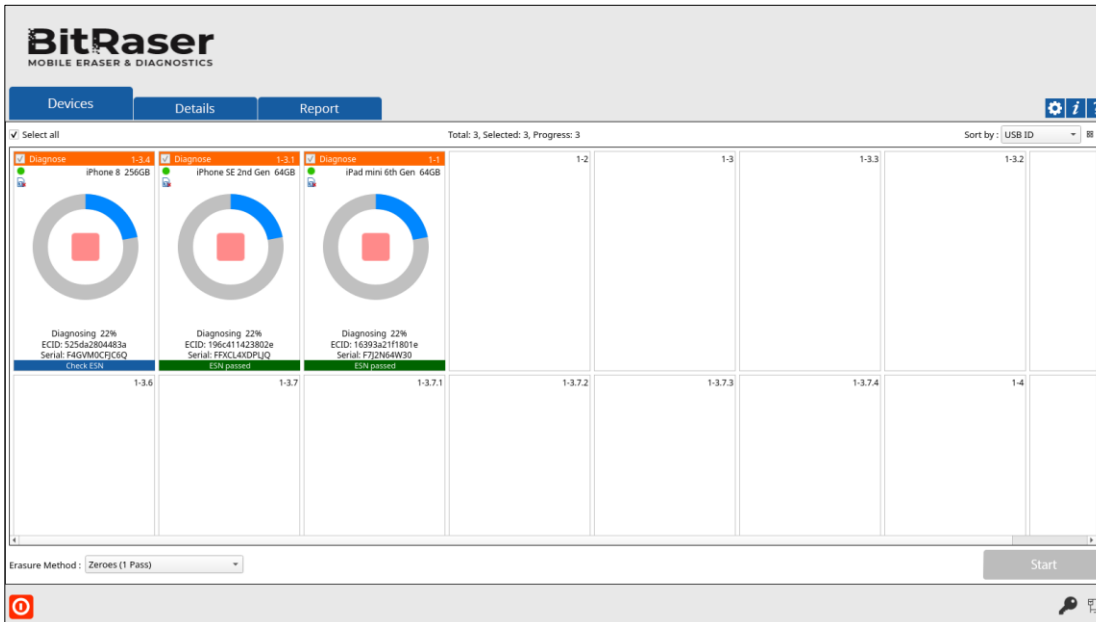

For **iOS** devices, the application prompts the user to **Start Application**. Go to **Settings > General > Device Management > Stellar Data Recovery INC** and click on **Trust "Stellar Data Recovery INC"**. On the pop-up message click **Trust**. Now start the **BitraserMobileDiagnostics** application on the device from the home screen to initiate the diagnostic process.

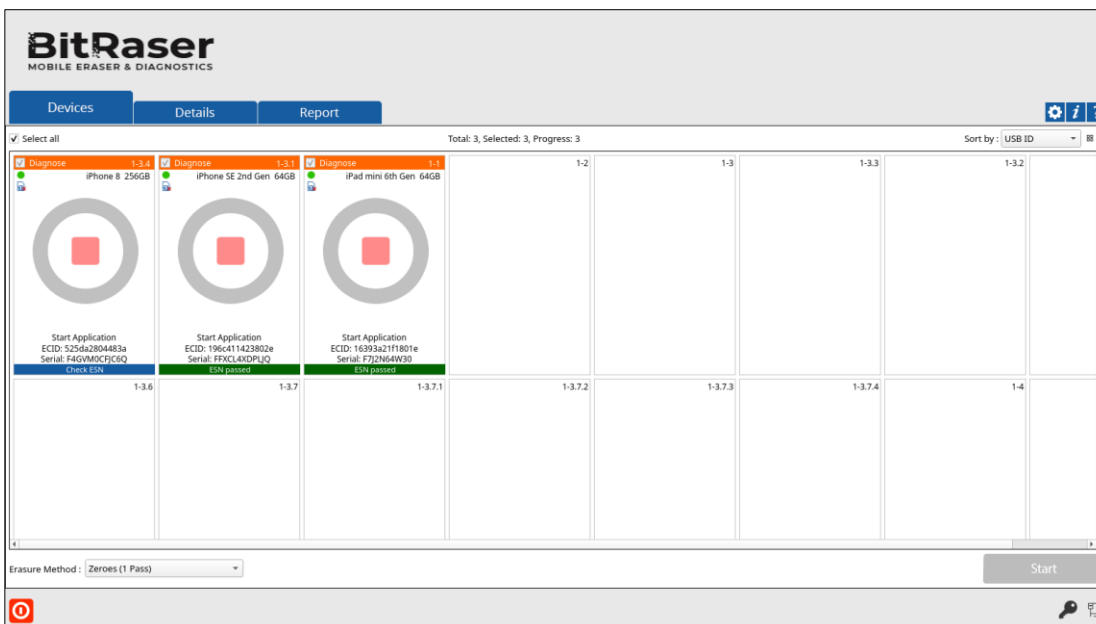

3. Automatic Diagnostic Tests: The automatic diagnostic tests starts immediately after the diagnostic procedure is initiated. The device at this stage goes through a series of automatic tests. You can view the progress of the diagnostic process by double-clicking on the device and clicking on the **Progress** tab from the **Device Information** dialog that opens:

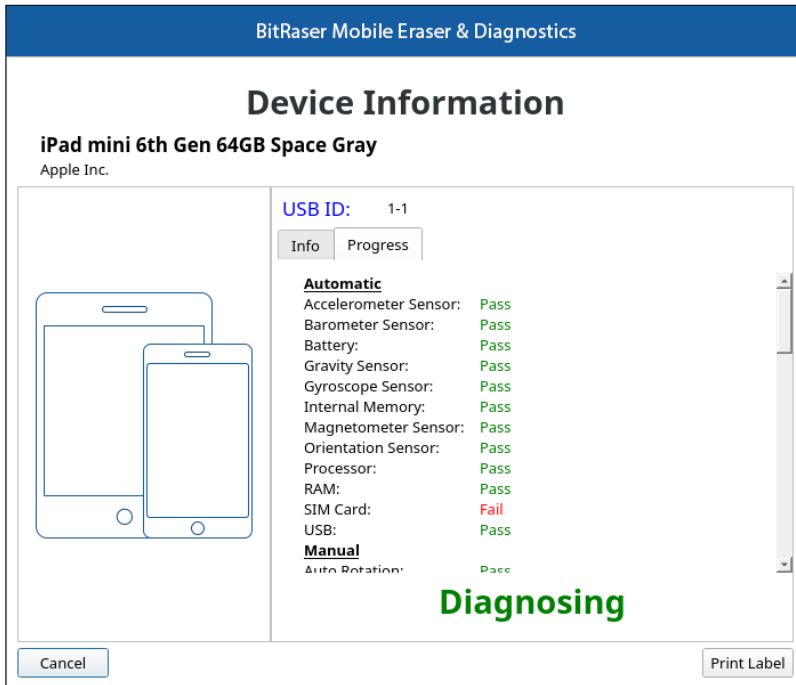


4. Manual Diagnostic Tests: At this stage, the device goes through a series of manual tests. These are a series of easy tests that you need to perform manually on the device. Follow the simple instructions on the device to perform these tests.

5. Accessories and Grading: After the completion of manual tests, the device gives you an option to enter the accessories such as charger, earphone, memory card, original packing, etc. that are available with the device. Mark the check-boxes for the accessories if they are available.

The device also asks you to grade the back cover, body, display, and overall grading on a scale of A+, A, B, and C with A+ being the highest grading and C being the lowest.

When the diagnose gets successfully completed, the icon displays a green color with the text '**Completed**'. The icon displays a red color with the text '**Failed**' in case of diagnose failure.

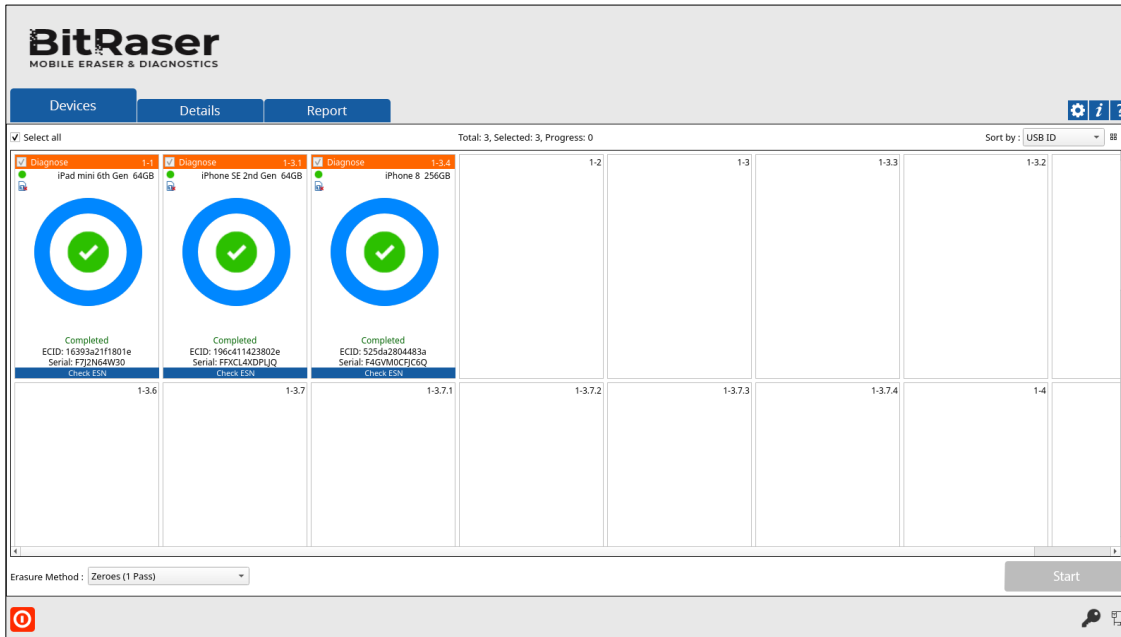

Things to Note:

- Before the onset of the diagnostic process on an android device, the [USB Debugging](#) must be in ENABLE mode for the device you are connecting.
- When you install **BitRaser Mobile Eraser & Diagnostics** on a device running **Android OS**, you control which capabilities or information **BitRaser Mobile Eraser & Diagnostics** can access-known as **Permissions**. For example, an application might want permission to see your device contacts or location. See [Allow Permissions on an Android device](#) to know the required steps. You can control which permissions that an application can access after the application installs on your device. Keep in mind turning off permissions may cause **BitRaser Mobile Eraser & Diagnostics** on your device to lose functionality.

How to Enable the USB Debugging Mode on Your Phone?


1. Go to settings in your android device and click the “**About device**” option.
2. Select “**Software info**” from the about device page.
3. Tap the **Build number** eight times to make **Settings > Developer Options** available.
4. Go back to the setting page and scroll down until you see “**Developer Options**”. Select **Developer Options**.
5. On the Developer Options page scroll down and enable **USB Debugging**.

Procedure to Install BitRaserMobileDiagnostics.apk on Redmi Devices:


1. Open **File Manager** on your **Redmi** phone




2. Locate and open **BitRaser** folder

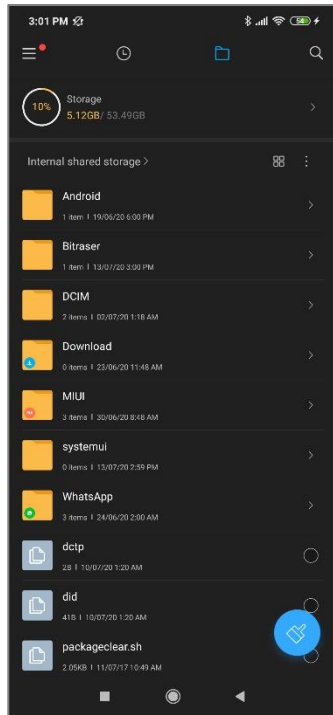


3. Select and open **BitRaserMobileDiagnostics.apk**

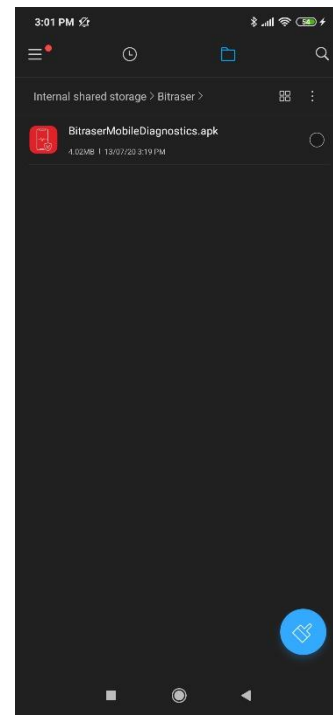


4. Click **Install** to begin the installation process

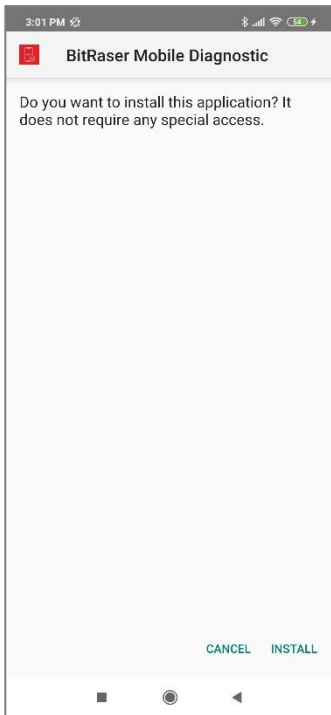

5. Wait while the device installs the **.apk** file

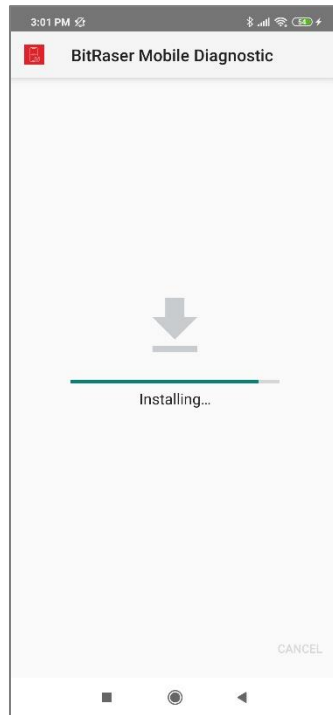

6. **BitRaser Mobile Diagnostic** is installed successfully

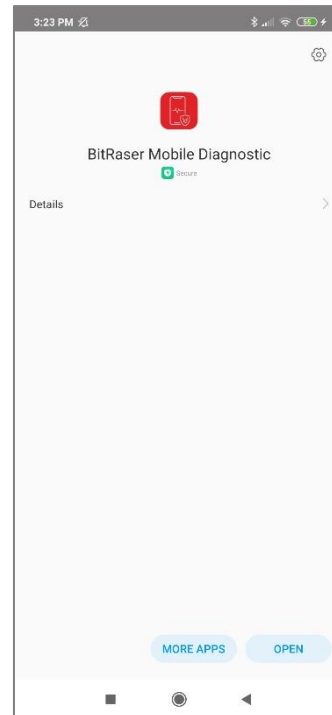

3.4. DETAILS SECTION

The **Details** section allows you to fill in the generic information related to the customer. These details must be entered by the user which can later be modified if required.

The information mentioned in these fields will be added to the **Report**. The **Details** section have the following three sub-sections:

1. Enter Details

FIELD NAME	DESCRIPTION
Customer Details	This section allows you to enter the details of the customer.
Customer Name Customer Address	Name of the customer for whom the erasure or diagnosis is to be done. Location of the customer for whom the erasure or diagnosis is to be done.
Device Details	This section allows you to enter the details of the device.
Device Source Device Destination	You get an option to record the source (user who has handed over the device) and destination (user who will be assigned the device after erasure or diagnosis) of the device.
Technician Performing Erasure	This section allows you to enter the details of the technician who is going to perform the process.
Technician Name Organization	Name of the technician processing the device. Name of the organization providing the service.
Person Validating Erasure	This section allows you to enter the details of the person validating the process.
Validator Name Organization	Name of the person validating the process. Name of the organization validating the process.
Comment/Notes	This section allows you to enter any other comments or notes that you want to include in the report. You can enter up to a maximum of 250 characters.

BitRaser
MOBILE ERASER & DIAGNOSTICS

Devices | **Details** | Report

Enter Details | Enter Asset Details | Enter Custom Fields

Customer Details
Customer Name: ABCD
Customer Address: EFGH

Device Details
Device Source: IJKLM
Device Destination: NOPQ

Technician Performing Operation
Technician Name: XYZ
Organization: ZZXX

Person Validating Operation
Validator Name: XYY
Organization: XYYZ


Comment/Notes (max 250 chars)
BitRaser - our cutting-edge erasure technology guarantees the wiping of sensitive data permanently from hard drives, SSDs, desktops, laptops & servers.

Reset | Save

You can reset these fields using the **Reset** button located at the bottom of the **Details** dialog box.

After making the required changes to **Details**, click **Save** to continue.

A **Saved Successfully** dialog appears. Click **OK**.

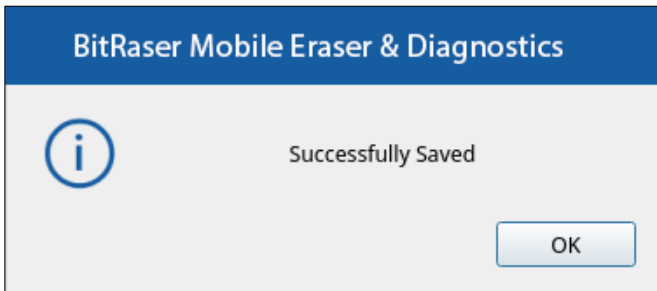

2. Enter Asset Details

- To set a particular asset tag for all the devices, select the radio button '**Enter all Devices Asset Tag**' and enter the asset tag in the corresponding text box.

The screenshot shows the BitRaser interface with the 'Details' tab selected. Under 'Enter Asset Details', the radio button for 'Enter All Devices Asset Tag' is selected. The text box next to it contains 'samsung devices'. Below this, there is a table with the following data:

Asset Tag	USB Port Name	Type	Serial No/ECID
samsung devices	1-2	iPhone 7 Black 32GB	DNPV81Q95KN
samsung devices	1-3.4	iPhone 8 Gold 256GB	F4GVMOCFCEQ
samsung devices	1-3.5	iPhone 5 Black 64GB	DNPKL1BH39C

Buttons for 'Reset' and 'Save' are visible at the bottom of the form area.

- To set an individual asset tag for the device, select the radio button '**Enter individual Device Asset Tag**' and enter the **Asset Tag** for each device, this section has the following fields:

FIELD NAME	DESCRIPTION
Asset Tag	Enter the Asset Tag associated with the device.
USB Port Name	The USB Port name is set by default.
Type	The Device Type is set by default.
Serial No/ECID	The Serial No/ECID associated with the device is set by default.

The screenshot shows the BitRaser interface with the 'Details' tab selected. Under 'Enter Asset Details', the radio button for 'Enter Individual Device Asset Tag' is selected. The text box next to it contains 'samsung devices'. Below this, there is a table with the following data:


Asset Tag	USB Port Name	Type	Serial No/ECID
samsung devices	1-2	iPhone 7 Black 32GB	DNPV81Q95KN
samsung devices	1-3.4	iPhone 8 Gold 256GB	F4GVMOCFCEQ
samsung devices	1-3.5	iPhone 5 Black 64GB	DNPKL1BH39C

Buttons for 'Reset' and 'Save' are visible at the bottom of the form area.

You can reset the asset tags that you entered using the **Reset** button located at the bottom of the **Details** dialog box.

After making the required changes to **Details**, click **Save** to continue.

A **Saved Successfully** dialog appears. Click **OK**.

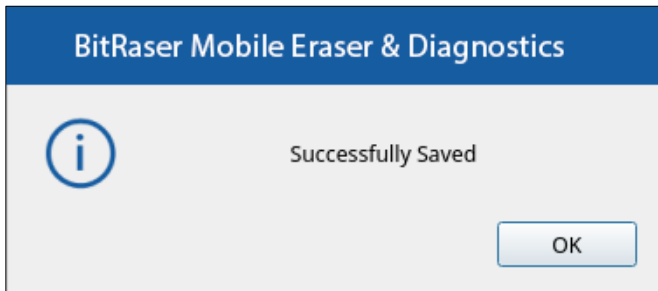

3. Enter Custom Fields:


BitRaser Mobile Eraser & Diagnostics also allows you to create custom fields to enter in the Reports. You can create up to two sets of custom fields with each Custom Field Set containing up to 10 custom fields. The following two fields are available for each set:

- **Enter Custom Field Name:** Allows you to enter the name of the custom field.
- **Enter Custom Field Value:** Allows you to enter the value of the custom field.

You can reset these fields using the **Reset** button located at the bottom of the **Details** dialog box.

After making the required changes to **Details**, click **Save** to continue.

A **Saved Successfully** dialog appears. Click **OK**.

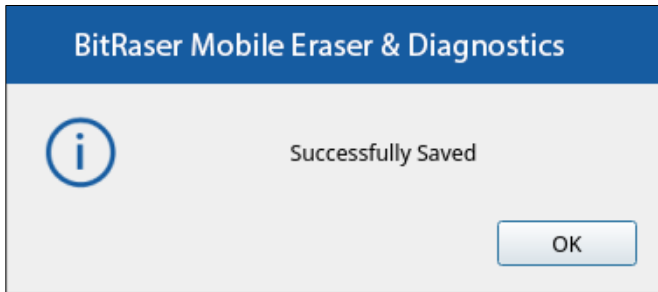

3.5. WORKING ON REPORTS

The **Report** tab in the **BitRaser Mobile Eraser & Diagnostics** application displays all of the erasure and diagnostic processes that either have been completed or failed.

USB Port	Serial No	Type	Customer	Asset Tag	Date	Time	IMEI	Status	ESN Status
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:42:27	353023114452324	Failed	Passed
1-3.4	F4GVMOCFJ6Q	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:27:24	356705087363531	Completed	N/A
1-3.1	FFXCL4XDPLJQ	iPhone SE 2nd Gen Black	Sebastian Flick	Orbit Devices	05/06/2022	09:27:22	356490102121111	Completed	N/A
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	09:27:20		Completed	N/A
1-3.4	F4GVMOCFJ6Q	iPhone 8 Gold			05/06/2022	08:46:52	356705087363531	Completed	N/A
1-3.1	FFXCL4XDPLJQ	iPhone SE 2nd Gen Black			05/06/2022	08:46:50	356490102121111	Completed	N/A
1-3.1	DNQPTXG7G5MC	iPhone 6 Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:07	359304060416917	Completed	N/A
1-2	F19RQQL8H2XW	iPhone SE Gold	Sebastian Flick	Orbit Devices	05/06/2022	11:10:05	355793077633510	Completed	N/A
1-3.4	DMPOK247LMT7	iPad mini 5th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:03	353182100345569	Completed	N/A
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	10:43:00	353023114452324	Failed	Passed
1-3.4	F4GVMOCFJ6Q	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:58:24	356705087363531	Completed	N/A
1-3.1			Sebastian Flick		05/06/2022	09:53:27		Completed	Passed
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:53:27	353023114452324	Failed	Passed
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray			05/06/2022	08:46:48		Completed	N/A

BitRaser Mobile Eraser & Diagnostics gives an option to search reports for the processes performed. Based on the specification of records, different filters help in fetching records more quickly. You can search for multiple reports using certain search criteria. This makes the search operation efficient as the user can straight away find the intended result.

BitRaser Mobile Eraser & Diagnostics provides you with erasure and diagnostic reports as follows:

- An erasure report provides information such as Customer Details, Device Information, Battery Information, Erasure Information, Erasure & Validation Details. A sample erasure report is given as follows:

BitRaser Mobile Eraser & Diagnostics

BitRaser **stellar**

BitRaser Mobile Report

Erasure Status: **Successful** Report ID: 4699

Customer Details
 Customer Name: Customer Address:

Device Information:
 Manufacturer: Apple Inc. Device Type: Mobile Device
 Model Name: iPhone 6 GSM+CDMA Space Gray Size: 16GB
 Serial Number: DNQPTXG7G5MC Name: iPhone
 UDID: 3df679862f3a4bf7ae5e0e95533dade2b0a26952 ECID: 12d3a2053c426
 IMEI: 359304060416917 Device OS: iOS 12.5.5
 Model Number: MG4N2 FMIP: **Unlocked**
 MDM: **Unlocked** JailBreak Device: **No**
 ESN Status: **Passed, Wed May 04 2022 14:53:29** Asset Tag:
 Device Source: Device Destination:

Battery Information
 Serial Number: F5D5185BJVCFW5RBN Cycle: 187
 Health: **Excellent**, 1654/1751 mAh (5 %) Temperature: 82.6 °F

Erasure Information
Digital Identifier b643217de24071a13645b0dcfbf03a14 Tool Used: BitRaser Mobile Eraser and Diagnostics 3.0.0.3
 Method 1: Native OS Erasure Write Passes: 1
 Start Time: Wed May 04 2022 14:59:40 End Time: Wed May 04 2022 15:08:30
 Duration: 08m:50s Status: **Completed**
 Method 2: Zeros Write Passes: 1
 Start Time: Wed May 04 2022 15:08:30 End Time: Wed May 04 2022 15:17:51
 Duration: 09m:21s Status: **Completed**

Back

- A diagnostic report provides information such as Customer Details, Device Information, Battery Information, Diagnostic Information, Diagnostic & Validation Details. A sample diagnostic report is given as follows:

BitRaser Mobile Eraser & Diagnostics

BitRaser **stellar**

BitRaser Mobile Report

Diagnostics Status: **Completed** Diagnostics Date: Fri May 06 2022 11:10:07

Customer Details
 Customer Name: Sebastian Flick Customer Address: 63 Rimbanda Road Shannon vale

Device Information:
 Manufacturer: Apple Inc. Device Type: Mobile Device
 Model Name: iPhone 6 GSM+CDMA Space Gray Size: 16GB
 Serial Number: DNQPTXG7G5MC Name: iPhone
 UDID: 3df679862f3a4bf7ae5e0e95533dade2b0a26952 ECID: 12d3a2053c426
 IMEI: 359304060416917 Device OS: iOS 12.5.5
 Model Number: MG4N2 FMIP: **Unlocked**
 MDM: **Unlocked** JailBreak Device: **No**
 ESN Status: N/A Asset Tag:
 Device Source: Orbit Travel Corp. Device Destination: Gart Sports

Battery Information
 Serial Number: F5D5185BJVCFW5RBN Cycle: 187
 Health: **Good**, 1565/1751 mAh (10 %) Temperature: 90.7 °F


Report Information
 Report ID: 2210 **Digital Identifier:** dd46d30ef9e535c84da801bb460a9573 Tool Used: BitRaser Mobile Eraser & Diagnostics 3.0.0.3

Custom Fields
 Company: Orbit Travel Co Address: 63 Rimbanda Road Shabbon vale NSW 2370
 State: Jaxon Country: Australia
 Mobile 1: 43XXXXXX23 Mobile 2: 7410XXXX63
 Email: deniesricheyXXX@amityspy.com Fax No.: CD898XXX
 Customer Name: Orbit Travel SSN: 64770XXXXX
 Company: Cell Spots Address: 63 Rimbanda Road Shabbon vale NSW 2370

Back

To search BitRaser Mobile Eraser & Diagnostics reports:


1. Run **BitRaser Mobile Eraser & Diagnostics**. Select the **Report** tab.
2. The upper right pane of the screen, shows the criteria to be entered. This can be set up depending on what the user wants.

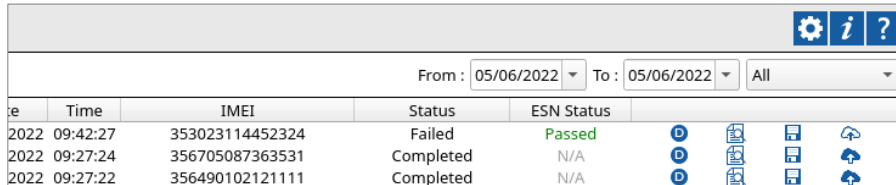

Time	IMEI	Status	ESN Status
2022 09:42:27	353023114452324	Failed	Passed
2022 09:27:24	356705087363531	Completed	N/A
2022 09:27:22	356490102121111	Completed	N/A

Specify the date range in the **From** and **To** fields, if you want to search reports for processes performed from a specific period i.e., between two dates.

The '**All**' drop-down button displays:

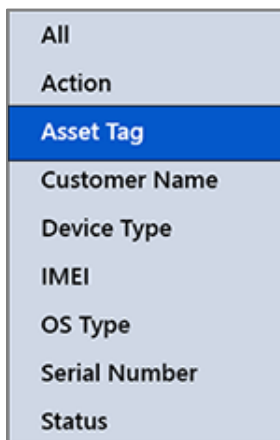


All
Action
Asset Tag
Customer Name
Device Type
IMEI
OS Type
Serial Number
Status

- **Action:** This option enables you to filter data based on the type of process (Diagnose or Erase).
- **Asset Tag:** Select this option if you know the asset tag assigned to a device.
- **Customer Name:** Select this option if you know the person who performed the erasure process.
- **Device Type:** This option enables you to filter data based on the type of device and/or its model.
- **IMEI:** Select this option if you know the IMEI number of a device.
- **OS Type:** This option enables you to filter data based on the type of operating system on your device.
- **Serial Number:** Select this option if you know the serial number of a device.
- **Status:** Select this option if you know the process status i.e., Completed, Failed, or Running.

- The application will show all the reports fulfilling the search criteria. A list of all the reports generated on the specific time period mentioned, along with the information like USB Port, Serial No, Type, Customer Name, Asset Tag, Date, Time, IMEI, Status, and Action are displayed.

USB Port	Serial No	Type	Customer	Asset Tag	Date	Time	IMEI	Status	ESN Status				
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:42:27	353023114452324	Failed	Passed				
1-3.4	F4GVMOCFJCSQ	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:27:24	356705087363531	Completed	N/A				
1-3.1	FXCL4XDPLQ	iPhone SE 2nd Gen Black	Sebastian Flick	Orbit Devices	05/06/2022	09:27:22	356490102121111	Completed	N/A				
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	09:27:20		Completed	N/A				
1-3.4	F4GVMOCFJCSQ	iPhone 8 Gold			05/06/2022	08:46:52	356705087363531	Completed	N/A				
1-3.1	FXCL4XDPLQ	iPhone SE 2nd Gen Black			05/06/2022	08:46:50	356490102121111	Completed	N/A				
1-3.1	DNQPTXG7ESMC	iPhone 6 Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:07	359304660416917	Completed	N/A				
1-2	F19RXQL8H2XW	iPhone SE Gold	Sebastian Flick	Orbit Devices	05/06/2022	11:10:05	355793077633510	Completed	N/A				
1-3.4	DMPDK247LMT7	iPad mini 5th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:03	353182100345569	Completed	N/A				
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	10:43:00	353023114452324	Failed	Passed				
1-3.4	F4GVMOCFJCSQ	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:58:24	356705087363531	Completed	N/A				
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:53:27		Failed	Passed				
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray			05/06/2022	08:46:48	353023114452324	Completed	N/A				

- The **Action** tab provides the shortcuts to perform the following functions:
 - Process icon** or : This shows an icon indicating the Erasure or Diagnostic process.
 - Preview** : This function enables you to see how the **Report** looks like before you save or print it.
 - Save** : This option allows you to save the **Report** in PDF, XML, and CSV formats. The reports can be saved to an external storage device, not to the device where **BitRaser Mobile Eraser & Diagnostics** application is launched.
 - Send to Cloud** : This option allows you to send the reports over the **BitRaser Cloud**.


- In case you want to [customize the report](#), select the **Report Settings** button  located at the bottom left of the screen.

3.5.1. PREVIEW REPORT

BitRaser Mobile Eraser & Diagnostics allows you to preview a report after it has been generated. This function enables you to see how the report looks like before you save/print it. You cannot make any changes in preview mode. The report contains information like Customer Details, Device Information, Erasure or Diagnostic Information, Technician performing the process, and Person validating the process.

To preview a report:

1. Select the **Report** tab.
2. Click **Preview**  button from the **Action** tab of the report that you want to preview.

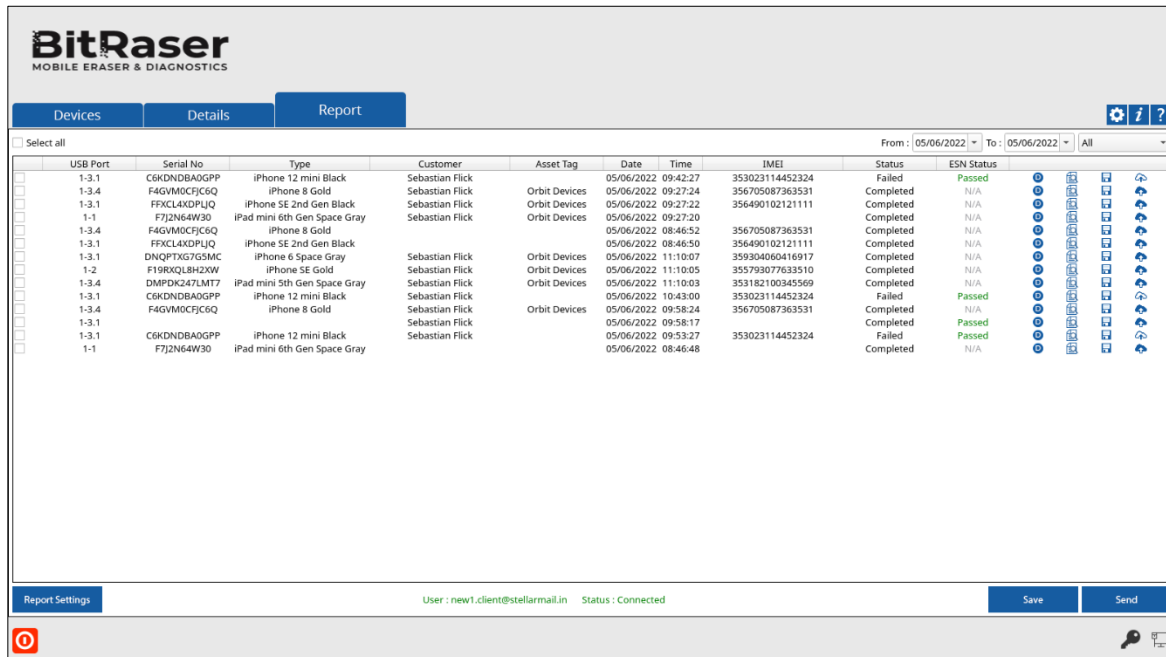

USB Port	Serial No	Type	Customer	Asset Tag	Date	Time	IMEI	Status	ESN Status	
1-3.1	CGKDNDBADGPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:42:27	353023114452324	Failed	Passed	
1-3.4	F4GVMOCFJCSQ	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:27:24	356705087363531	Completed	N/A	
1-3.1	FXCL4XDPLQ	iPhone SE 2nd Gen Black	Sebastian Flick	Orbit Devices	05/06/2022	09:27:22	356490102121111	Completed	N/A	
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	09:27:20		Completed	N/A	
1-3.4	F4GVMOCFJCSQ	iPhone 8 Gold			05/06/2022	08:46:52	356705087363531	Completed	N/A	
1-3.1	FXCL4XDPLQ	iPhone SE 2nd Gen Black			05/06/2022	08:46:50	356490102121111	Completed	N/A	
1-3.1	DNGPTXGJESMC	iPhone 6 Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:07	359304060416917	Completed	N/A	
1-2	F19RXQL8H2XW	iPhone SE Gold	Sebastian Flick	Orbit Devices	05/06/2022	11:10:05	355793077633510	Completed	N/A	
1-3.4	DMPDK247LMT7	iPad mini 5th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:03	353182100345569	Completed	N/A	
1-3.1	CGKDNDBADGPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	10:43:00	353023114452324	Failed	Passed	
1-3.4	F4GVMOCFJCSQ	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:58:24	356705087363531	Completed	N/A	
1-3.1	CGKDNDBADGPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:58:17		Completed	Passed	
1-3.1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick		05/06/2022	09:53:27	353023114452324	Failed	Passed	
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray			05/06/2022	08:46:48		Completed	N/A	

3. The report will be displayed in a new window as shown below.

BitRaser Mobile Eraser & Diagnostics

BitRaser **stellar**

BitRaser Mobile Report

Diagnostics Status: **Completed** Diagnostics Date: Fri May 06 2022 11:10:07

Customer Details
Customer Name: Sebastian Flick Customer Address: 63 Rimbanda Road Shannon vale

Device Information:
Manufacturer: Apple Inc. Device Type: Mobile Device
Model Name: iPhone 6 GSM+CDMA Space Gray Size: 16GB
Serial Number: DNQPTXG7G5MC Name: iPhone
UDID: 3df679862f3a4bf7ae5e0e95533dade2b0a26952 ECID: 12d3a2053c426
IMEI: 359304060416917 Device OS: iOS 12.5.5
Model Number: MG4N2 FMIP: **Unlocked**
MDM: **Unlocked** JailBreak Device: **No**
ESN Status: N/A Asset Tag: Orbit Devices
Device Source: Orbit Travel Corp. Device Destination: Gart Sports

Battery Information
Serial Number: F5D5185BJVCFW5RBN Cycle: 187
Health: **Good**, 1565/1751 mAh (10 %) Temperature: 90.7 °F

Report Information
Report ID: 2210 Digital Identifier: dd46d30ef9e535c84da801bb460a9573 Tool Used: BitRaser Mobile Eraser & Diagnostics 3.0.0.3

Custom Fields
Company: Orbit Travel Co Address: 63 Rimbanda Road Shabbon vale NSW 2370
State: Jaxxon Country: Australia
Mobile 1: 43XXXXXX23 Mobile 2: 7410XXXX63
Email: deniesrichyXXX@amityspy.com Fax No.: CD898XXX
Customer Name: Orbit Travel SSN: 64770XXXX
Company: Orbit Travel Address: 63 Rimbanda Road Shabbon vale NSW 2370

[Back](#)

Note: You cannot preview more than one report at a time.

3.5.2. SAVE REPORT

You can save a report for future use once it has been generated. The report can be saved in PDF, XML, or CSV format.

To Save an erasure Report:

1. Select the **Report** tab.
2. Select the desired reports which you want to save by checking on the check-boxes. You can click **Select All** to select all the files.

USB Port	Serial No	Type	Customer	Asset Tag	Date	Time	IMEI	Status	ESN Status
1-3.1	C6KDNDBADGPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:42:27	353023114452324	Failed	Passed
1-3.4	F4GVM0CFJ6Q	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:27:24	356705087363531	Completed	N/A
1-3.1	FFXCL4XDPLQ	iPhone SE 2nd Gen Black	Sebastian Flick	Orbit Devices	05/06/2022	09:27:22	356490102121111	Completed	N/A
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	09:27:20		Completed	N/A
1-3.4	F4GVM0CFJ6Q	iPhone 8 Gold			05/06/2022	08:46:52	356705087363531	Completed	N/A
1-3.1	FFXCL4XDPLQ	iPhone SE 2nd Gen Black			05/06/2022	08:46:50	356490102121111	Completed	N/A
1-3.1	DNQPTXG7G5MC	iPhone 6 Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:07	359304060416917	Completed	N/A
1-2	F19RQQL8H2XW	iPhone SE Gold	Sebastian Flick	Orbit Devices	05/06/2022	11:10:05	355793077633510	Completed	N/A
1-3.4	DMPDK247LMT7	iPad mini 5th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:03	353182100345569	Completed	N/A
1-3.1	C6KDNDBADGPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	10:43:00	353023114452324	Failed	Passed
1-3.4	F4GVM0CFJ6Q	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:58:24	356705087363531	Completed	N/A
1-3.1					05/06/2022	09:58:17		Completed	Passed
1-3.1	C6KDNDBADGPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:53:27	353023114452324	Failed	Passed
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray			05/06/2022	08:46:48		Completed	N/A

3. Click on the **Save** button at the lower pane of your screen to save all the selected reports. Alternatively, you can click **Save** button from the **Action** tab to save one report at a time. A dialog prompts as illustrated below:

BitRaser Mobile Eraser & Diagnostics

Select destination path :
BITMOB/123

Report Format
 pdf xml csv

4. Click **Browse** to select a destination to save the report file in external media.
5. Select the desired format as **PDF, XML, or CSV**. Click **OK** to proceed.

Note: The report cannot be saved to the hard drive where **BitRaser Mobile Eraser & Diagnostics** is launched.

3.5.3. SEND REPORT TO BITRASER CLOUD

BitRaser Mobile Eraser & Diagnostics provides you with an option to send the selected reports to the **BitRaser Cloud**. This requires that the connection to the Cloud Console is working i.e., the user must be connected to the Cloud.

Note: Checking the 'Auto send completed report to cloud' option in the [General Settings](#) section of the **Settings** window automatically sends the report to the BitRaser Cloud Console.

To send reportings to the cloud:

1. Select the **Report** tab.
2. Select the desired reports which you want to send.

USB Port	Serial No	Type	Customer	Asset Tag	Date	Time	IMEI	Status	ESN Status
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:42:27	353023114452324	Failed	Passed
1-3.4	F4GVMOCFJ6GQ	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:27:24	356705087363531	Completed	N/A
1-3.1	FFXCL4XDPLJQ	iPhone SE 2nd Gen Black	Sebastian Flick	Orbit Devices	05/06/2022	09:27:22	356490102121111	Completed	N/A
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	09:27:20		Completed	N/A
1-3.4	F4GVMOCFJ6GQ	iPhone 8 Gold			05/06/2022	08:46:52	356705087363531	Completed	N/A
1-3.1	FFXCL4XDPLJQ	iPhone SE 2nd Gen Black			05/06/2022	08:46:50	356490102121111	Completed	N/A
1-3.1	DNQPTXG7G5MC	iPhone 6 Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:07	359394060416917	Completed	N/A
1-2	F19BQXLBH2XW	iPhone SE Gold	Sebastian Flick	Orbit Devices	05/06/2022	11:10:05	355793077633510	Completed	N/A
1-3.4	DMPDK247LMT7	iPad mini 5th Gen Space Gray	Sebastian Flick	Orbit Devices	05/06/2022	11:10:03	353182100345569	Completed	N/A
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	10:43:00	353023114452324	Failed	Passed
1-3.4	F4GVMOCFJ6GQ	iPhone 8 Gold	Sebastian Flick	Orbit Devices	05/06/2022	09:58:24	356705087363531	Completed	N/A
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:53:27		Completed	Passed
1-3.1	C6KDNDBA0GPP	iPhone 12 mini Black	Sebastian Flick		05/06/2022	09:53:27	353023114452324	Failed	Passed
1-1	F7J2N64W30	iPad mini 6th Gen Space Gray	Sebastian Flick		05/06/2022	08:46:48		Completed	N/A

3. Click on **Send** button located at the lower pane of your screen to send the selected reports over **BitRaser Cloud**. Alternatively, click button from the **Action** tab of the report that you wish to send.

Note: icon shows that the report has been sent to BitRaser Cloud successfully and shows that the report has not been sent to BitRaser Cloud.

4. The desired reports will be sent to the **BitRaser Cloud Console**.

3.5.4. CHANGE REPORT SETTINGS

To customize the report, select the **Report Settings** button located at the bottom left of the screen.

The screenshot shows the 'Report Settings' dialog box for BitRaser Mobile Eraser & Diagnostics. It is divided into three sections: Signature Settings, Header Settings, and Image Settings. The Signature Settings section has two rows, each with a checkbox, a text field containing 'BitRaser_Sign.png', and a 'Browse...' button. The Header Settings section has a text field with 'Enter header text (max 30 chars)' and 'BitRaser Mobile Report'. The Image Settings section has two rows, each with a checked checkbox, a text field containing 'Stellar.png' or 'BitRaser_Watermark.png', and a 'Browse...' button. At the bottom, there is a red warning message: 'Changes made here would not be displayed on cloud report'. Below this are three buttons: 'Cancel', 'Reset', and 'Save'.

- In the **Report Settings** dialog box, you can edit the following fields:

Field Name	Description
Report Settings	This section allows you to customize Reports like signature settings, header settings, top-right logo, and watermark.
Signature Settings	This section allows you to add a signature image of the technician and validator.
Select technician signature image (170 x 48 PNG)	You can change the technician's signature image here.
Select validator signature image (170 x 48 PNG)	You can change the validator's signature image here.

Header Settings	You can either enter Header information like header text or header image here.
Enter header text (max 30 characters)	Enter the header text.
Image Settings	This section allows you to add the top-right logo and watermark image.
Select top right logo (170 x 48 PNG) Select watermark (225 x 300 PNG)	You can change the top-right logo image of the report here. You can change the watermark image of the report here.

Note: You can reset **Report Settings** fields using the **Reset** button located at the bottom right of the Report Settings dialog box.


Note: Signature images, Logo, and Watermark image size needs to be the same as specified in Report Settings. **BitRaser Mobile Eraser & Diagnostics** will accept images with a specified size only. In the case of a size mismatch, **BitRaser Mobile Eraser & Diagnostics** will continue to use the previously selected images.


- After making the required changes to **Report Settings**, click **Save** to update settings.

Note: Changes made to reports settings in **BitRaser Mobile Eraser & Diagnostics** application will not be updated on the **BitRaser Cloud** report.

3.6. FORGOT LOGIN PASSWORD


BitRaser Mobile Eraser & Diagnostics provides an option to reset your login password if you forget it. The software also has an option to set and view a **Password Hint** to help you remember your old password.

If you have set a **Password Hint** at the time of [Creating New User Profile](#), you can view the hint by hovering your mouse cursor over **Password Hint Icon**  on the **User Login** screen:

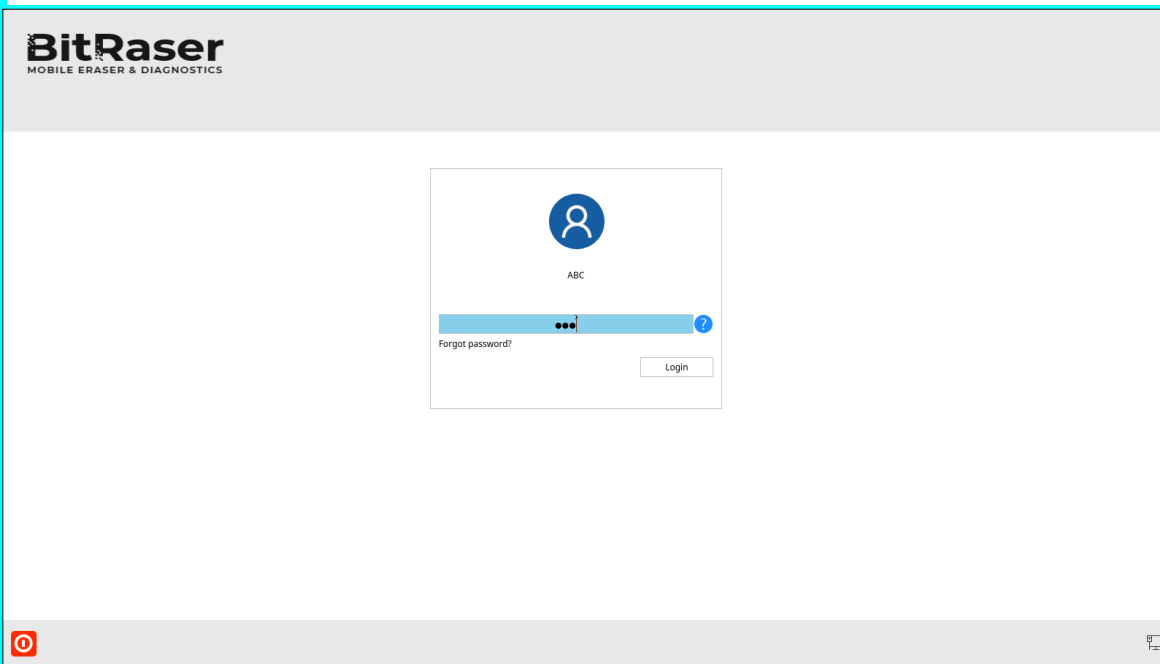

If you don't remember your password, use the following steps to reset it:


1. On the **User Login** screen, click on **Forgot password?**. The **Enter Master Password** screen appears as shown below:

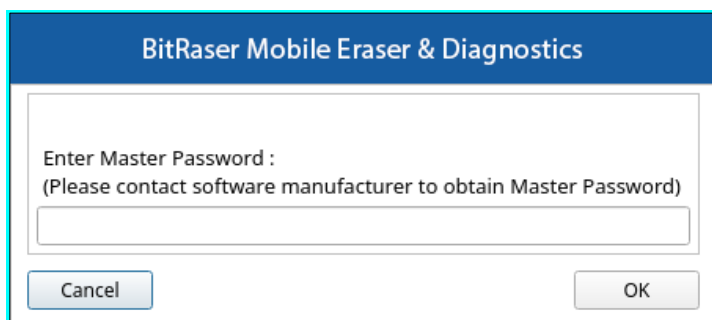

2. Enter the Master Password that you received along with **BitRaser Mobile Eraser & Diagnostics** software from Stellar and click **OK**.
Note: The master password is a unique password sent to you by Stellar along with the **BitRaser Mobile Eraser & Diagnostics** software.

3. The Reset password screen appears if the master password that you have entered is correct. The screen has the following fields:

- New Password
- Confirm New Password
- Password Hint (Optional)

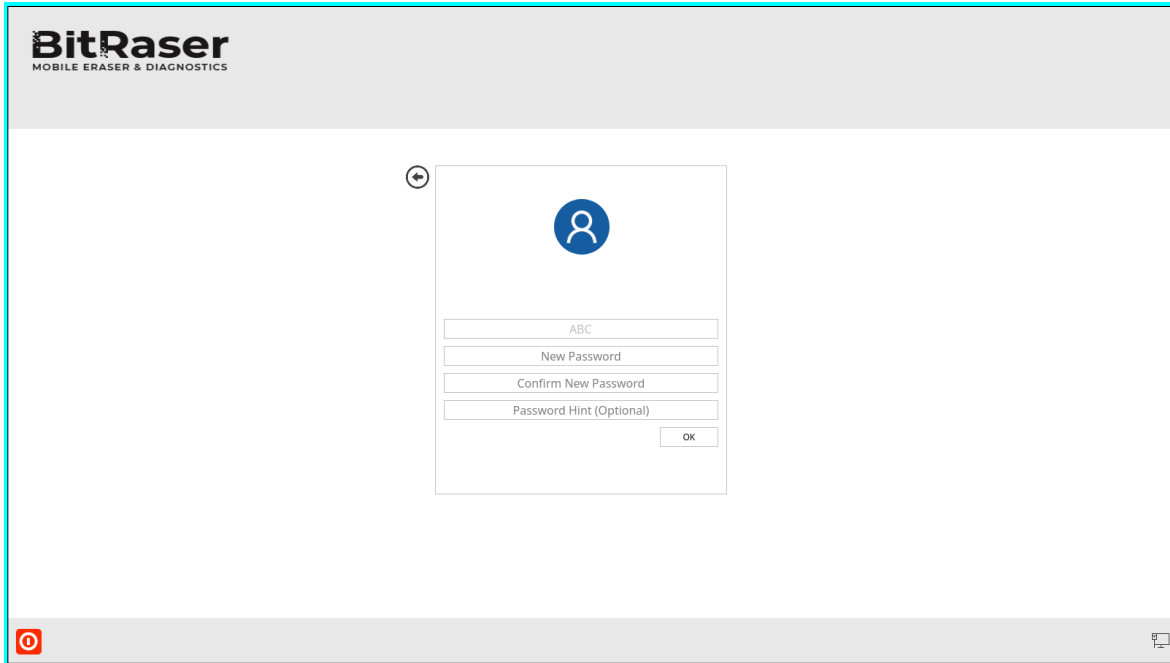

4. Fill in the above fields and click **OK** to reset the password.

4. FREQUENTLY ASKED QUESTIONS (FAQ)

1. I want to erase or diagnose multiple iOS devices at a time, is it possible to do so using BitRaser Mobile Eraser & Diagnostics?

Yes, **BitRaser Mobile Eraser & Diagnostics** allows you to erase or diagnose multiple iOS devices at the same time.

2. Does BitRaser Mobile Eraser & Diagnostics support other languages?

BitRaser Mobile Eraser & Diagnostics is currently available in the **English** language only.

3. Is it possible to edit the existing fields of the report?

Yes, you can edit existing fields from the report of **BitRaser Mobile Eraser & Diagnostics** as per your requirement.

4. Is it possible to edit the USB Identifier for the USB Port of a particular device?

Yes, **BitRaser Mobile Eraser & Diagnostics** allows you to change the identifier for the USB port.

5. Why do iOS devices need a firmware update and Android devices do not?

iOS uses Cryptographic Erasure. In this process, the firmware is downloaded and restored on the device. Encryption keys are changed and the data on the device is rendered inaccessible. After this, other overwrite methods may be applied. In the case of **Android** devices, a traditional overwrite of all storage and a factory reset is done, thus a new firmware is not needed.

6. When I erase an android device, the erasure process comes to a standstill at 8 percent. Why does this happen?

When you install **BitRaser Mobile Eraser & Diagnostics** on a device running Android OS, you control which capabilities or information **BitRaser Mobile Eraser & Diagnostics** can access—known as **Permissions**. Thus, the user needs to grant all the required permissions for the erasure process to proceed.

7. When I try to erase or diagnose a device, I get a failed status. What could be the problem?

Failure of the process mostly occurs due to the following reasons:

- There might be some issues with internet connectivity. Make sure that your internet connection is active.
- Your USB cable has probably disconnected or is not supported. Make sure you are using a genuine USB cable provided by your device manufacturer. Reconnect your device and then try to erase or diagnose it again.
- The USB port on your computer is loose or not functioning properly. Change the USB port and try again.

8. I got failed status while performing erasure or diagnostic process but the license was consumed. Will another license be consumed if I start another process?

No, you can perform the erasure or diagnostic process again within 24hrs without consuming another license for the same device.

9. Which algorithm should I choose for the best erasure?

It depends upon how many times an algorithm overwrites the data precisely or the number of passes used to erase the data. More the passes used by the algorithm, the more effective it is. Each algorithm performs a different set of features from where you can choose the suitable algorithm as per the requirement.

10. I want to perform a diagnostics process on my Redmi phone. After connecting my phone, the software is asking me to install an app on my device. How to install the app?

BitRaser Mobile Eraser & Diagnostics need a **BitraserMobileDiagnostics.apk** (application) to be installed manually on **Redmi** phones, to perform the diagnostic process. See [Procedure to install BitraserMobileDiagnostics.apk on Redmi Phone](#) to know the required steps.

11. The application is taking too long to erase the data. Why does this happen?

It depends on the size of the data you are erasing, the configuration of the system, and the algorithm you are using to erase the data. A large amount of data, lesser configuration, and more number of passes may consume more time for erasure.

12. Can I erase data from MDM (Mobile device management) from my mobile device?

Yes, **BitRaser Mobile Eraser & Diagnostics** can erase data from MDM (Mobile Device Management) Apple Inc. mobile (iPhones, iPads and iPod Touch) devices only.

13. Can I erase data from Jailbreak mobile devices?

Yes, **BitRaser Mobile Eraser & Diagnostics** can erase data from Jailbreak Apple Inc. mobile (iPhones, iPads and iPod Touch) devices only.

14. Why do I need to check the ESN status of the mobile device before Erasure/Diagnostics process?

ESN check gives you a precise information if the device is reported, blacklisted or a genuine product. This way, you can rest assured that you can perform data Diagnostics/Erasure on a genuine product. Refer to [ESN Check](#) for more details.

5. LEGAL NOTICES

Copyright

BitRaser software, accompanied user manual and documentation are copyright of Stellar Information Technology Private Limited with all rights reserved. Under the copyright laws, this user manual cannot be reproduced in any form without the prior written permission of Stellar Information Technology Private Limited. No Patent Liability is assumed, however, with respect to the use of the information contained herein.

Copyright © Stellar Information Technology Private Limited. All rights reserved.

Disclaimer

The Information contained in this manual, including but not limited to any product specifications, is subject to change without notice.

STELLAR INFORMATION TECHNOLOGY PRIVATE LIMITED PROVIDES NO WARRANTY WITH REGARD TO THIS MANUAL OR ANY OTHER INFORMATION CONTAINED HEREIN AND HEREBY EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE WITH REGARD TO ANY OF THE FOREGOING STELLAR INFORMATION TECHNOLOGY PRIVATE LIMITED ASSUMES NO LIABILITY FOR ANY DAMAGES INCURRED DIRECTLY OR INDIRECTLY FROM ANY TECHNICAL OR TYPOGRAPHICAL ERRORS OR OMISSIONS CONTAINED HEREIN OR FOR DISCREPANCIES BETWEEN THE PRODUCT AND THE MANUAL. IN NO EVENT SHALL STELLAR INFORMATION TECHNOLOGY PRIVATE LIMITED, BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL SPECIAL, OR EXEMPLARY DAMAGES, WHETHER BASED ON TORT, CONTRACT OR OTHERWISE, ARISING OUT OF OR IN CONNECTION WITH THIS MANUAL OR ANY OTHER INFORMATION CONTAINED HEREIN OR THE USE THEREOF.

Trademarks

BitRaser® is a registered trademark of Stellar Information Technology Private Limited.

All Trademarks Acknowledged.

All other brands and product names are trademarks or registered trademarks of their respective companies.

License Agreement - BitRaser

BitRaser

Copyright © Stellar Information Technology Private Limited. INDIA

www.stellarinfo.com

All rights reserved.

All product names mentioned herein are the trademarks of their respective owners.

This license applies to the standard-licensed version of **BitRaser**.

Your Agreement to this License

You should carefully read the following terms and conditions before using, installing or distributing this software, unless you have a different license agreement signed by Stellar Information Technology Private Limited.

If you do not agree to all of the terms and conditions of this License then do not copy, install, distribute or use any copy of **BitRaser** with which this License is included, you may return the complete package unused without requesting an activation key within 30 days after purchase for a full refund of your payment.

The terms and conditions of this License describe the permitted use and users of each Licensed Copy of **BitRaser**. For purposes of this License, if you have a valid single-user license, you have the right to use a single Licensed Copy of BitRaser. If you or your organization has a valid multi-user license, then you or your organization has the right to use up to a number of Licensed Copies of **BitRaser** equal to the number of copies indicated in the documents issued by Stellar when granting the license.

Scope of License

Each Licensed Copy of **BitRaser** may either be used by a single person or used non-simultaneously by multiple people who use the software personally installed on a single workstation. This is not a concurrent use license. All rights of any kind in **BitRaser**, which are not expressly granted in this license, are entirely and exclusively reserved to and by Stellar Information Technology Private Limited. You shall not rent, lease, modify, translate, reverse engineer, decompile, disassemble or create derivative works based on **BitRaser** nor permit anyone else to do so. You shall not make access to **BitRaser** available to others in connection with a service bureau, application service provider or similar business nor permit anyone else to do so.

Warranty Disclaimers and Liability Limitations

BitRaser and all accompanying software, files, data and materials are distributed and provided AS IS and with no warranties of any kind, whether expressed or implied. You acknowledge that good data processing procedure dictates that any program including **BitRaser** must be thoroughly tested with non-critical data before there is any reliance on it and you hereby assume the entire risk of all use of the copies of **BitRaser** covered by this License. This disclaimer of warranty constitutes an essential part of this License. In addition, in no event does Stellar authorize you or anyone else to use **BitRaser** in applications or systems where its failure to perform can reasonably be expected to result in a significant physical injury or in loss of life. Any such use is entirely at your own risk and you would not hold Stellar responsible for any and all claims or losses relating to such unauthorized use.

In no event shall Stellar Information Technology Private Limited or its suppliers be liable for any special, incidental, indirect, or consequential damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or any other pecuniary loss) arising out of the use of or inability to use the software product or the provision of or failure to provide support services, even if Stellar Information Technology Private Limited has been advised of the possibility of such damages. In any case, Stellar Information Technology Private Limited's entire liability under any provision shall be limited to the amount actually paid by you for the software product.

General

This License is the complete statement of the agreement between the parties on the subject matter and merges and supersedes all other or prior understandings, purchase orders, agreements and arrangements. This License shall be governed by the laws of the State of Delhi, India. Exclusive jurisdiction and venue for all matters relating to this License shall be in courts and fora located in the State of Delhi, India and you consent to such jurisdiction and venue. There are no third party beneficiaries of any promises, obligations or representations made by Stellar herein. Any waiver by Stellar of any violation of this License by you shall not

constitute nor contribute to a waiver by Stellar of any other or future violation of the same provision or any other provision of this License.

Copyright © Stellar Information Technology Private Limited. All rights reserved.

6. ABOUT STELLAR

Stellar is the world's foremost Data Care Corporation, with expertise in Data Recovery, Data Erasure, Mailbox Conversion, and File Repair software and services. Stellar has been in existence from the past 25+ years and is a customer-centric, critically acclaimed, global data recovery, data migration & erasure solutions provider with cost-effective solutions available for large corporate, SMEs & Home Users.

Stellar is an ISO 9001 and ISO 27001 certified organization and has a strong presence across the USA, Europe & Asia.

For more information about us, please visit www.stellarinfo.com.